AD-A035 720 RENSSELAER POLYTECHNIC INST TROY N Y DEPT OF ELECTRI--ETC F/G 9/1
INTERFACE STATES IN SCHOTTKY BARRIER DIODES.(U)
AUG 76 J M BORREGO, R J GUTMANN, S ASHOK F19628-74-C-0102
UNCLASSIFIED RADC-TR-76-267 NL

| OF |
AD
A035720



END

DATE
FILMED
3-77

AD A035720

RADC-TR-76-267
Final Technical Report
August 1976

INTERFACE STATES IN SCHOTTKY BARRIER DIODES

Rensselaer Polytechnic Institute

Approved for public release; distribution unlimited

This research was supported by the Defense Nuclear Agency
under Subtask Z99QAXTB056, Work Unit 52, entitled
"Radiation Effects on Solid State Microwave Device Structures"

DDC
RECEIVED
FEB 16 1977
A

ROME AIR DEVELOPMENT CENTER
AIR FORCE SYSTEMS COMMAND
GRIFFISS AIR FORCE BASE, NEW YORK 13441

This report has been reviewed by the RADC Information Office (OI) and is releasable to the National Technical Information Service (NTIS). At NTIS it will be releasable to the general public, including foreign nations.

This technical report has been reviewed and is approved.

Donald A. Neamen

DONALD A. NEAMEN
Contract Monitor

Unclassified

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE	READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER: RADC-TR-76-267	2. GOVT ACCESSION NO.
3. RECIPIENT'S CATALOG NUMBER	
4. TITLE (and Subtitle): INTERFACE STATES IN SCHOTTKY BARRIER DIODES.	5. TYPE OF REPORT & PERIOD COVERED: Final, 28 Jun 74 - 31 Dec 75
	6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s): Jose M. Borrego, Ronald J. Gutmann, S. Ashok	8. CONTRACT OR GRANT NUMBER(s): F19628-74-C-0102
9. PERFORMING ORGANIZATION NAME AND ADDRESS: Electrical and Systems Engineering Department, Rensselaer Polytechnic Institute, Troy, New York 12181	10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS: 62704H, SDNA0025
11. CONTROLLING OFFICE NAME AND ADDRESS: HQ, Defense Nuclear Agency, Washington, DC 20305	12. REPORT DATE: August 1976; 13. NUMBER OF PAGES: 77
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office): Deputy for Electronic Technology (RADC), Hanscom AFB, Massachusetts 01731, Monitor/Walter M. Shedd/ETSD	15. SECURITY CLASS. (of this report): Unclassified; 15a. DECLASSIFICATION/DOWNGRADING SCHEDULE

16. DISTRIBUTION STATEMENT (of this Report)

Approved for public release; distribution unlimited.

17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)

18. SUPPLEMENTARY NOTES

This work sponsored by the Defense Nuclear Agency under: Subtask Code Z99QAXTB056 and Work Unit 52, entitled "Radiation Effects on Solid State Microwave Device Structures"

19. KEY WORDS (Continue on reverse side if necessary and identify by block number)

Schottky barrier, gallium arsenide, interface states, neutron radiation effects, transient ionizing radiation

20. ABSTRACT (Continue on reverse side if necessary and identify by block number)

The change in the electrical characteristics of Al-GaAs Schottky barrier diodes with neutron fluence has been determined. Al-nGaAs Schottky barrier diodes, fabricated from epitaxial and bulk material with carrier concentration in the range of between 7×10^{15} to 8×10^{16} cm^{-3}, were exposed to fast neutron irradiation at fluences where the change in free carrier concentration was less than 20%. In the lighter doped diodes, there was a slight change in the forward and reverse bias I-V characteristics after irradiation. The changes in the I-V characteristics indicate that the

DD FORM 1 JAN 73 1473 EDITION OF 1 NOV 65 IS OBSOLETE S/N 0102-014-6601 |

Unclassified 401 653

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

20. Abstract (Continued)

density of interface states changes during irradiation. The interface state density is approximated by a sharp peak of between 3×10^{13} to 10^{14} cm^{-2} eV^{-1} located at near the zero bias Fermi level before irradiation and after the low irradiation the density of interface states change by a factor of 2 to 5 and becomes less peaked. In the higher doped diodes, the reverse current change by at least an order of magnitude while the forward I-V characteristics remained essentially the same. The increase in reverse current is caused by high field emission from a trap whose energy for free carrier emission is of the order of 0.3 eV and it is similar to the one found previously in Au-nGaAs diodes.

The photo current of the Schottky junction, biased near and at avalanche breakdown, was measured under transient ionizing radiation at dose rates between 10^{8} to 10^{10} rads/sec. The photoresponse of the Au diodes to ionizing radiation is similar to the one observed in diffused pn junctions and it is not affected by the neutron irradiation at the low fluence used. These results indicate that IMPATT diode oscillator aftereffects observed under transient ionizing radiation are not due to the Schottky junction.

The effect of RF circuit tuning and of bias curcuit tuning in producing IMPATT diode oscillator aftereffects under transient ionizing radiation were experimentally evaluated. Half watt Si and GaAs X-band IMPATT diode oscillators were tested under transient ionizing radiation in a tunable disc-and-post type waveguide cavity. The results indicate that the principal cause of the aftereffects is a device-circuit interaction and is related to the impedance of the RF circuit and not the bias circuit impedance. Of the several devices tested, the GaAs Schottky IMPATTs were more prone to the aftereffects than the diffused devices.

FOREWORD

Under Air Force Cambridge Research Laboratories, Contract No. F 19628-74-C-0102, sponsored by the Defense Nuclear Agency, the Electrical and Systems Engineering Department of Rensselaer Polytechnic Institute has been carrying out research toward studying the effect of neutron irradiation on the metal-semiconductor interface and the resultant performance of Schottky barrier diodes (including with transient ionizing radiation). This final report presents the results obtained during the last six months of the 18 months research program.

The authors wish to acknowledge the help given by J. Floyd in the neutron irradiations at Brookhaven National Laboratory and D. E. Lapierre and J. R. Capelli during the transient ionizing irradiations at AFCRL. Special thanks are given to our contract monitor, Dr. D. A. Neamen, for the many technical discussions and suggestions throughout the program. The extra effort and diligence of Ms. Ardell Deane while typing the several reports and communications prepared during the program are gratefully acknowledged.


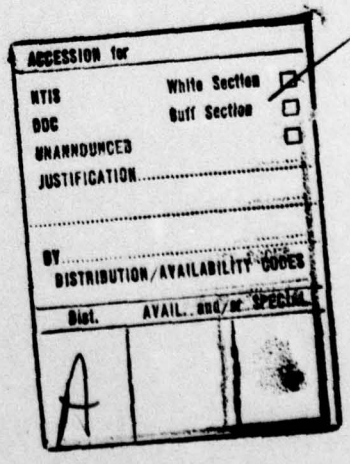


TABLE OF CONTENTS

		Page
1.0	INTRODUCTION	1
1.1	Overview	1
1.2	Summary of First Part of the Program	2
1.3	Second Part of the Program	3
2.0	RADIATION RESULTS IN Al-nGaAs DIODES	5
2.1	Device Fabrication and Test Instrumentation	5
2.2	I-V Characteristics	9
2.3	C-V Characteristics	14
2.4	Excess Reverse Current	18
2.5	Interface State Density	21
2.6	Transient Ionizing Radiation Results	21
3.0	IMPATT DIODE AFTEREFFECTS	25
3.1	Devices Tested and Test Set-up	25
3.2	Influence of Bias Circuit	26
3.3	Influence of RF Circuit	27
3.4	Phenomenological Explanation of Results	34
3.5	Conclusions	39
4.0	SUMMARY AND CONCLUSIONS OF OVERALL PROGRAM	41
4.1	Neutron Radiation Effects	41
4.2	Transient Ionizing Radiation Behavior	43
4.3	IMPATT Diode Aftereffects	44
	REFERENCES	46
	APPENDIX I	48

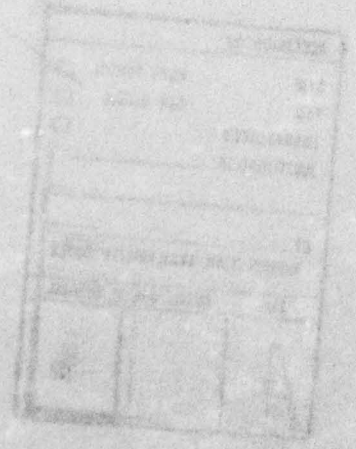

LIST OF FIGURES

		Page
Fig. 2.1	Photograph of top surface of Schottky barrier device chip	6
Fig. 2.2	Forward and reverse bias I-V characteristics of 1E16-1 before irradiation	10
Fig. 2.3	Forward and reverse bias I-V characteristics of 1E16-1 after irradiation	11
Fig. 2.4	Richardson plot of I_s/T^2 vs. 1/T of 1E16-1 before irradiation	12
Fig. 2.5	Richardson plot of I_s/T^2 vs. 1/T of 1E16-1 after irradiation	13
Fig. 2.6	Reverse bias I-V characteristics of 316 before and after irradiation	15
Fig. 2.7	$1/C^2$ vs. V near zero bias for 1E16-1 before and after irradiation	16
Fig. 2.8	Carrier removal rate as a function of free carrier concentration	17
Fig. 2.9	Increase in reverse current as a function of voltage after irradiation	19
Fig. 2.10	Increase in reverse current as a function of peak electric field at the interface	20
Fig. 2.11	Peak electric field at the interface as a function of change in barrier height	22
Fig. 2.12	Density of interface states before and after irradiation as a function of change in barrier height	23
Fig. 3.1	IMPATT diode bias circuit impedance as a function of frequency	28

LIST OF FIGURES (Cont'd.)

Page

Fig. 3.2 RF power of GaAs Schottky tuned without aftereffects 30
A. No extra cable between diode and bias box
B. Five feet of cable inserted

Fig. 3.3 RF power of GaAs Schottky tuned with aftereffects ... 31
A. No extra cable between diode and bias box
B. Five feet of cable inserted

Fig. 3.4 Bias voltage of GaAs Schottky tuned with aftereffects 32
A. No extra cable between diode and bias box
B. Five feet of cable inserted

Fig. 3.5 RF power of GaAs diffused tuned with aftereffects ... 35
A. No extra cable between diode and bias box
B. Five feet of cable inserted

Fig. 3.6 RF power of Si tuned with aftereffects 36
A. No extra cable between diode and bias box
B. Five feet of cable inserted

LIST OF TABLES

Page

Table 2-1 Room Temperature Characteristics of Al-nGaAs Schottky Diodes with Different Starting Material 8

1.0 INTRODUCTION

1.1 Overview

Gallium arsenide Schottky barrier junctions have become increasingly important in a wide variety of high performance GaAs microwave devices such as IMPATT diodes, Schottky gate FETs and RF detectors. Although neutron irradiation effects on silicon Schottky barrier junctions are well documented[1,2,3] no detailed results have been reported for GaAs Schottky junctions.[4] The purpose of this program was to explore the effect of fast neutron irradiation on the metal semiconductor interface and the resultant performance of Schottky barrier (including with transient ionizing radiation). Device changes at neutron fluences where the reduction in free carrier concentration is less than 20% were emphasized, as larger reductions in free carrier concentration lead to gross changes in junction properties that cannot be tolerated in most applications. Gold and aluminum were selected as the metals for forming the Schottky junctions since there is a large variety of results for Au-GaAs Schottky junctions reported in the literature, which could be used for comparison purposes, and because the Al-GaAs junction has a lower barrier height and appears to be more stable than the Au-GaAs interface.

The research program was divided into two parts. The first part of the program was concerned with the study of the Au-GaAs interface and lasted 12 months. It was also used for developing an appropriate device test structure, which eliminated surface leakage current effects, and for developing automated I-V and C-V measurement test set-ups which permitted

fast and accurate measurement of the electrical characteristics of the devices tested from 77°K to 400°K. The second part of the program, which lasted 6 months, was concerned with the changes in the Al-GaAs interface as well as with experimental study of the influence of the RF and bias circuits on producing anomalous aftereffects on IMPATT diode oscillators observed previously.[5]

1.2 Summary of the First Part of the Program

As mentioned above, the first part of the program was concerned with the study of the changes that take place at Au-nGaAs interface with neutron irradiation and the results have been reported previously.[6,7] The following summarizes the main results for Au-nGaAs Schottky barrier diodes.

The reverse I-V characteristics are greatly affected by neutron irradiation at fluences where the change in free carrier concentration was less than 10% while the forward characteristics are less sensitive to neutron irradiation. Typically the n factor at forward bias changed from 1.01 in unirradiated devices to 1.1 after irradiation. For forward bias and for small reverse bias the current in Au-nGaAs diodes is caused by thermionic emission and any changes in the I-V characteristics can be accounted for by a change in the density of interface states. The experimental results before and after neutron irradiation indicate that the interface state density model of Levine[8] has a small range of validity when carrier concentration and temperature are varied. In particular, the energy distribution of interface states changes from a highly peaked

distribution near the zero bias Fermi level (peak value $\sim 10^{14}/cm^2$ eV) before irradiation to a more uniform distribution of lower value ($\sim 10^{13}/cm^2$ eV) after irradiation.

The observed increase in reverse current (at voltages larger than 2 volts) after low fluence irradiation was found not to be due to conventional generation-recombination as has been found in silicon Schottky barriers.[1] The changes observed in the reverse current is larger in diodes with higher doping than in diodes with lighter doping. Furthermore, the reverse current was found to be more voltage dependent and less temperature dependent after irradiation than before irradiation, indicating that the increase in reverse current is due to a high field effect process. Consideration of several high field effect processes showed that enhanced field emission from a trap is a likely source of the reverse current.

Transient ionizing radiation measurements showed that the behavior of reverse biased Schotttky diodes under transient ionizing radiation operating below or in the avalanche regime, is not affected by neutron irradiation and it is similar to that reported previously for silicon pn junction diodes.[9] Comparable transient ionizing radiation data on Schottky barriers GaAs IMPATT oscillators indicated that aftereffects observed in their devices are not exclusively a junction effect but that device-circuit interactions are a likely cause.

1.3 Second Part of the Program

The second part of the research program had two objectives. The first one was to determine if the effects observed in neutron irradiated

Au-nGaAs diodes are sensitive to the type of metal used for forming the Schottky barrier. Aluminum was chosen as the metal to be used because it gives a lower barrier height and it appears to form a more stable interface in GaAs than gold does. The second objective was to determine the effect of the RF and bias circuits on the occurrence of aftereffects under transient ionizing radiation of IMPATT diode oscillators. This final report presents the results obtained during this final phase of the program.

Chapter 2 contains the radiation results in Al-nGaAs diodes. The test instrumentation, the interface state model for the Schottky barrier and the data reduction scheme used for interpreting the results obtained are similar to the ones used for Au-nGaAs diodes, it is not repeated here since it has been reported previously.[6] Chapter 3 describes the tests and results obtained in determining the effect of RF and bias circuits on causing aftereffects during transient ionizing radiation of commercial silicon, diffused and Schottky GaAs IMPATT diode oscillators. The last chapter, Chapter 4, summarizes the results obtained during the whole program.

2.0 RADIATION RESULTS IN Al-nGaAs DIODES

2.1 Device Fabrication and Test Instrumentation

The device structure used was the same as the one developed for the Au-nGaAs diodes and consists of four diodes on a 0.100" x 0.100" chip.[6] Three of the diodes had a guard ring in order to prevent surface currents from affecting the I-V measurements. An enlarged photograph of the device chip is shown in Fig. 2.1. The center dot is 15 mils in diameter which corresponds to an area of 1.1×10^{-3} cm^2.

The fabrication procedure used was similar to the one used for the Au-nGaAs devices with a few minor modifications. The starting material was either n bulk GaAs or nn^+ epitaxial (100) GaAs wafers with carrier concentrations in the range of 7×10^{15} to 8×10^{16} cm^{-3}. The fabrication sequence used was as follows: the back contact was formed by evaporating 6000 A^o indium on the back of the wafer followed by alloying at 350°C for two minutes in a forming-gas atmosphere. The Schottky barrier contact was formed by evaporating 1000-2000 A^o of Al with the wafer heated at 150°C. Before the aluminum evaporation the GaAs surface was carefully cleaned with HCl, rinsed with methanol and blown dry with filtered air. The device test structure was defined by etching the aluminum film from the unwanted areas using photolithographic techniques. The etch used for removing the aluminum was Transene Type D Aluminum etchant which is nitric acid free and does not attack the GaAs. The photoresist was removed with Trichloroethylene by scrubbing the wafer with a Q-tip. The next step was scribbing the wafer to separate the 0.100" x 0.100" chips. The chips were mounted on TO-5 headers with a silver epoxy and

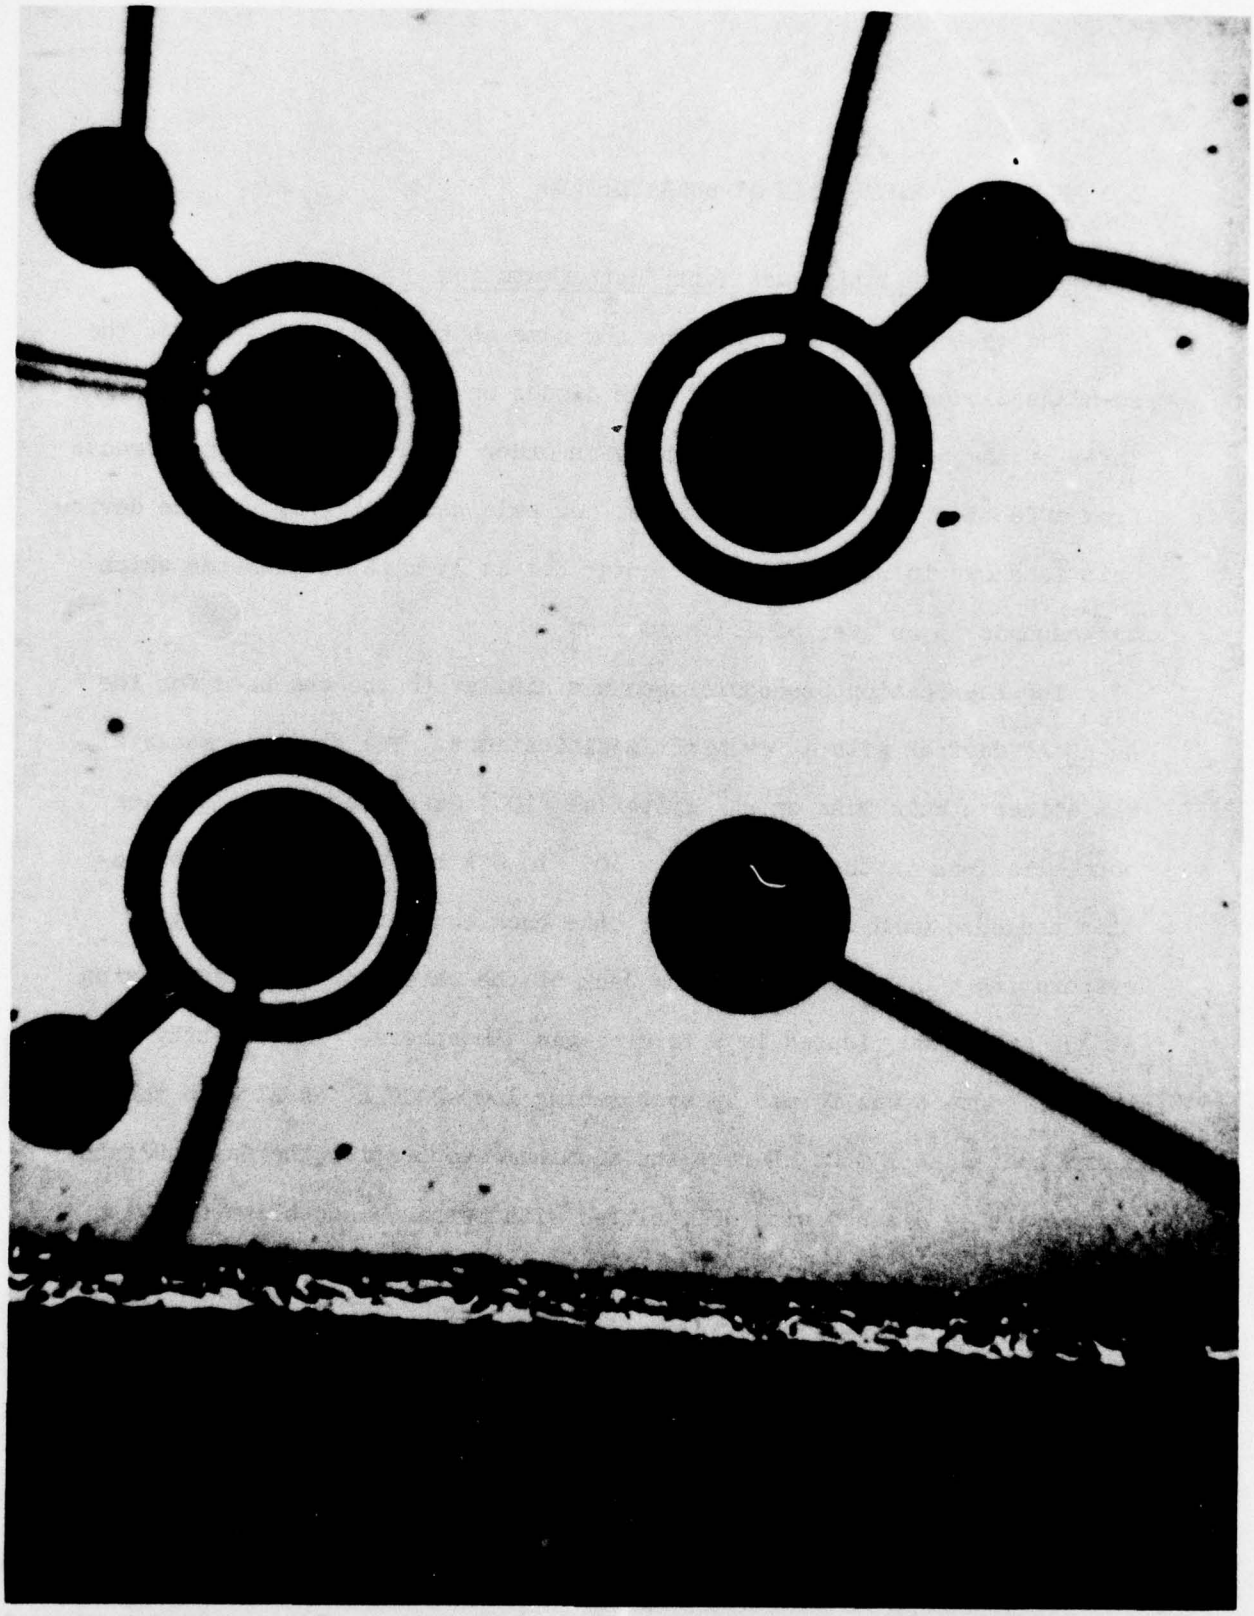


Fig. 2.1. Photograph of top surface of Schottky barrier device chip

cured overnight at a temperature between 100 and 125°C. Gold wires were bonded between the terminals of the TO-5 headers and the device terminals.

Using the above procedures Al-nGaAs were fabricated with forward and reverse current characteristics comparable to or better than the ones reported in the literature.(10) Table 2-1 presents a summary of the room temperature characteristics of the three series of Al devices fabricated during this part of the program.

The electrical characteristics of the devices before and after irradiations were determined using the test facilities developed during the first part of the program and described in detail in a previous report.(6) The facilities allowed automated swept DC I-V and 1 MHz C-V characteristics to be measured between 77°K to 400°K with great rapidity and high resolution in current, voltage and capacitance.

The fast neutron irradiations were carried out at the BMR reactor at BNL. The devices were irradiated to two different neutron fluences. A low neutron fluence of 3.6×10^{14} n/cm^2 was used in the lightly doped devices and a high neutron fluence of 2.2×10^{15} n/cm^2 was used in the highly doped devices. With the above neutron fluences the change in free carrier concentration was less than 20% and it will be described in detail later in the report.

Transient ionizing radiation testing was performed at the linear accelerator facility at AFCRL. The accelerator generated a 10 MeV electron beam of 100 nanosecond duration with dose rates between 10^8 to 10^{10} rads/sec. The photocurrent and voltage across the diode during the radiation pulse were recorded with the diodes in an evacuated chamber to

Table 2-1 - Room Temperature Characteristics of Al-nGaAs Schottky Diodes with Different Starting Material

Device Series	Starting Material	Carrier Concentration (cm^{-3})	n-factor (over 10^{-8} - 10^{-6} A)	Saturation Current (A) (extrapolated from forward I-V data)	Reverse Current (A)	Zero Bias Capacitance (pF)
Al/316	Bulk	7.2×10^{16}	1.04	1.7×10^{-10}	6.8×10^{-9} at 3 V	114
Al/1E16	Epitaxial (4 μm)	1.2×10^{16}	1.03	3.7×10^{-10}	2×10^{-9} at 4 V	50
Al/7E15	Epitaxial (6 μm)	6.8×10^{15}	1.014	2×10^{-10}	2.3×10^{-9} at 7.5 V	39

prevent air ionization from affecting the measurements. The electron beam dose rate was determined using a calibrated PIN diode radiation detector. During the testing the radiation pulse was monitored by means of a Faraday cup. The results of these tests are described in Section 2.6 of this report.

2.2 I-V Characteristics

The forward and reverse bias I-V characteristics for device series 1E16-1 before and after the low fluence irradiation are shown in Figs. 2.2 and 2.3. The data shows that the forward characteristics changed slightly with the low neutron fluence, the n factor changed from 1.02 before irradiation to 1.03. Figures 2.4 and 2.5 are Richardson plots of I_s/T^2 vs. $1/T$ where T is the absolute temperatures and I_s is the leakage current obtained by extrapolating the forward bias I-V characteristics to the $V = 0$ intercept. Before irradiation the barrier height ϕ_B is 0.725 eV and the Richardson constant A^* has a value of 9.1 $A/cm^2\text{-}^oK^2$, which corresponds very closely to the theoretical value of 8 assuming a reduced effective mass of 0.067. After irradiation, the barrier height ϕ_B is 0.733 eV and A^* is close to 10. The above results indicate that Al-nGaAs diodes are less sensitive to low neutron irradiation than Au-GaAs.

The reverse current characteristics above room temperature did not change after irradiation. At lower temperatures and reverse voltages larger than 2 volts, the reverse current increased typically by a factor of 2 to 3 after the low neutron fluence. The large change observed previously in the reverse characteristics of Au-nGaAs and not observed in the Al-nGaAs diodes at low neutron fluence is due to the smaller

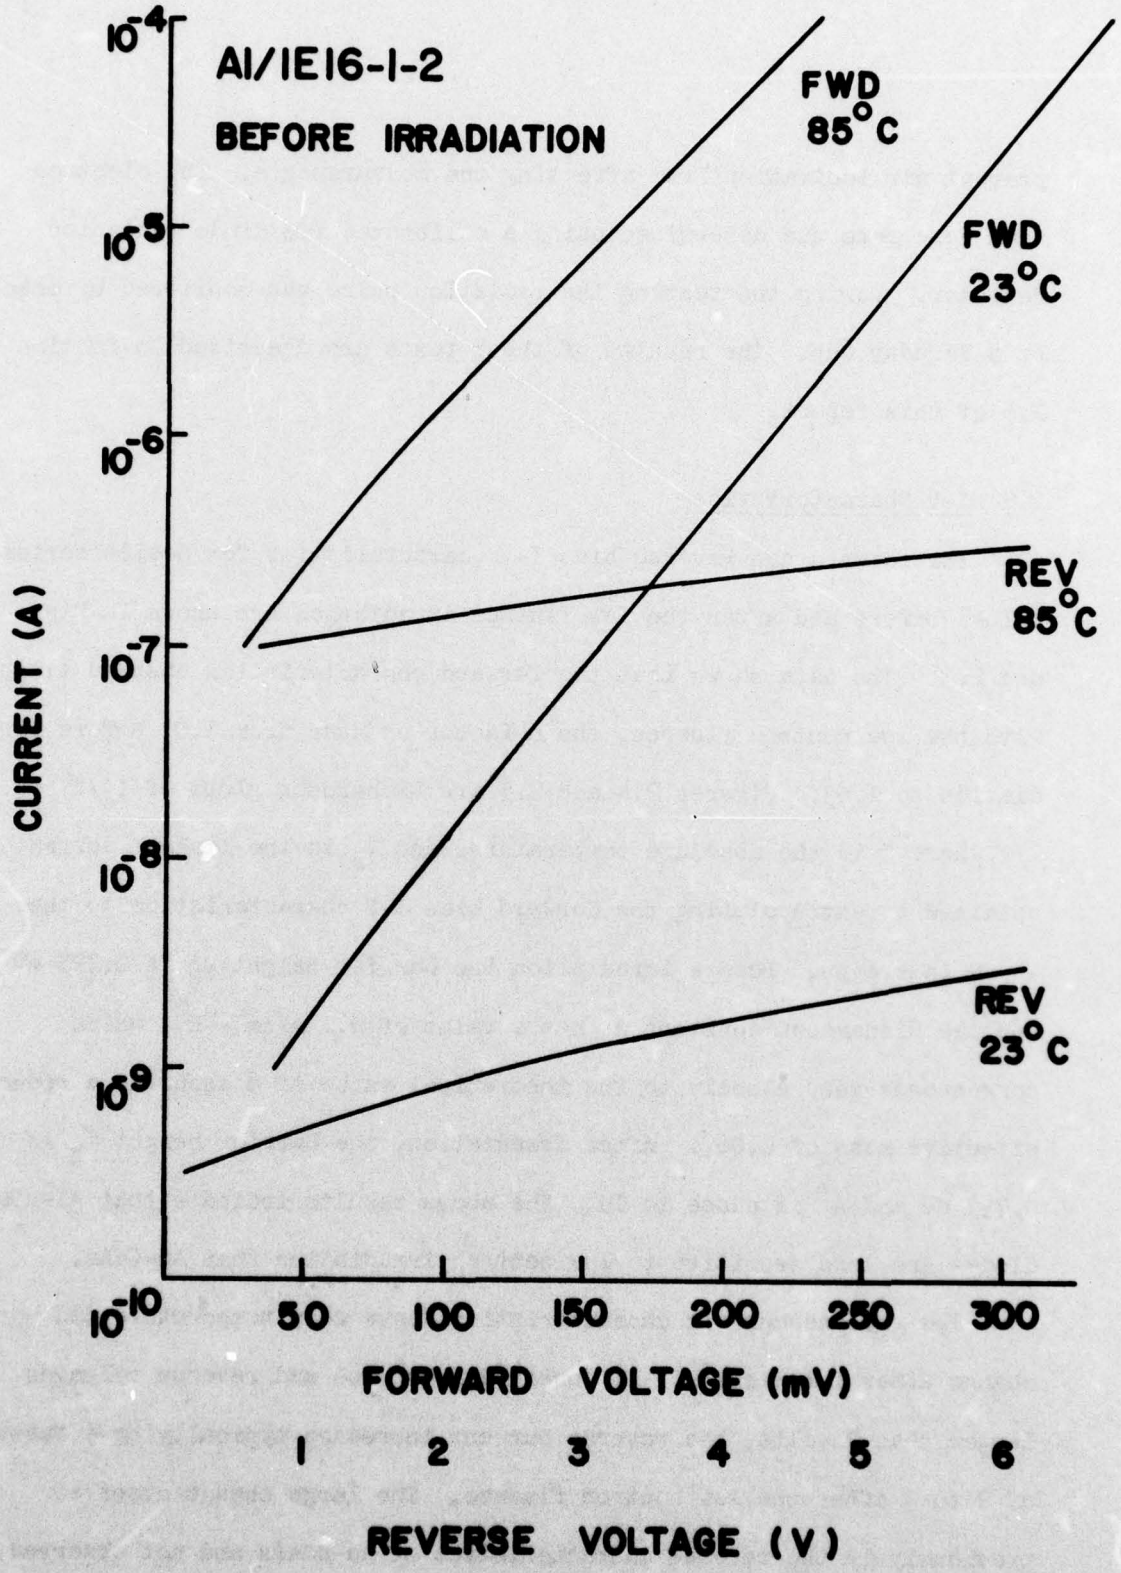


Fig. 2.2. Forward and reverse bias I-V characteristics of 1E16-1 before irradiation

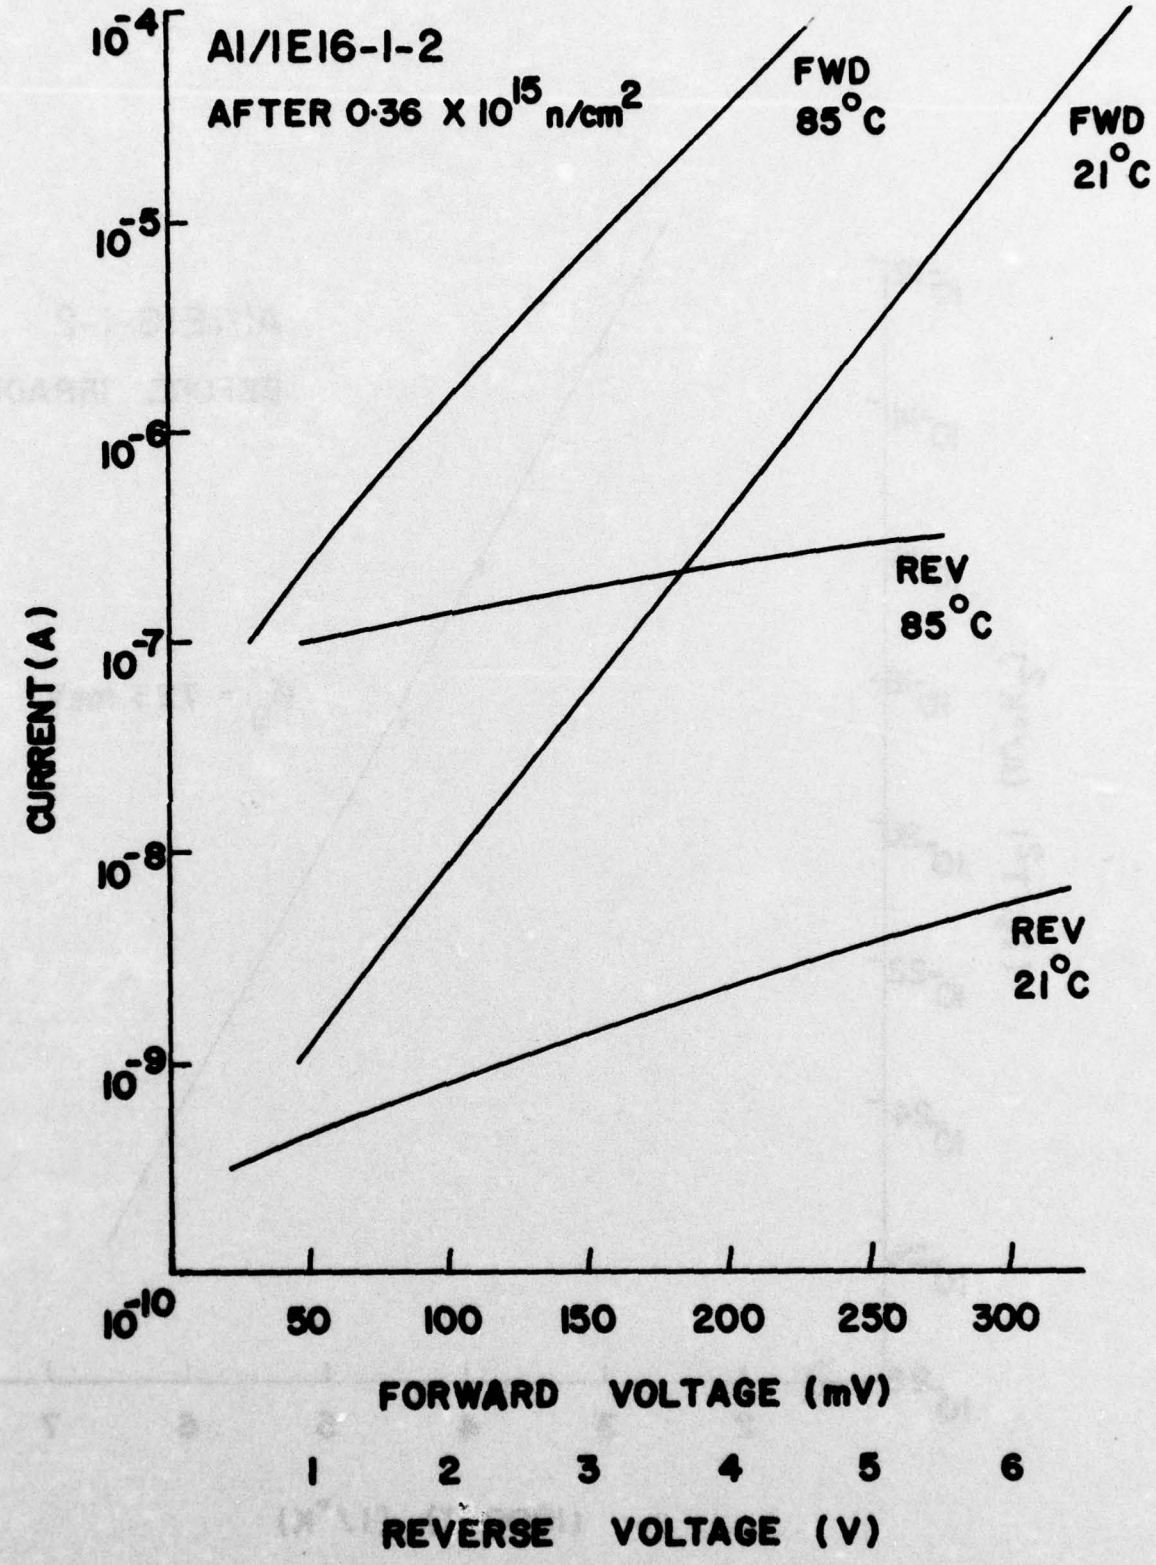


Fig. 2.3. Forward and reverse bias I-V characteristics of 1E16-1 after irradiation

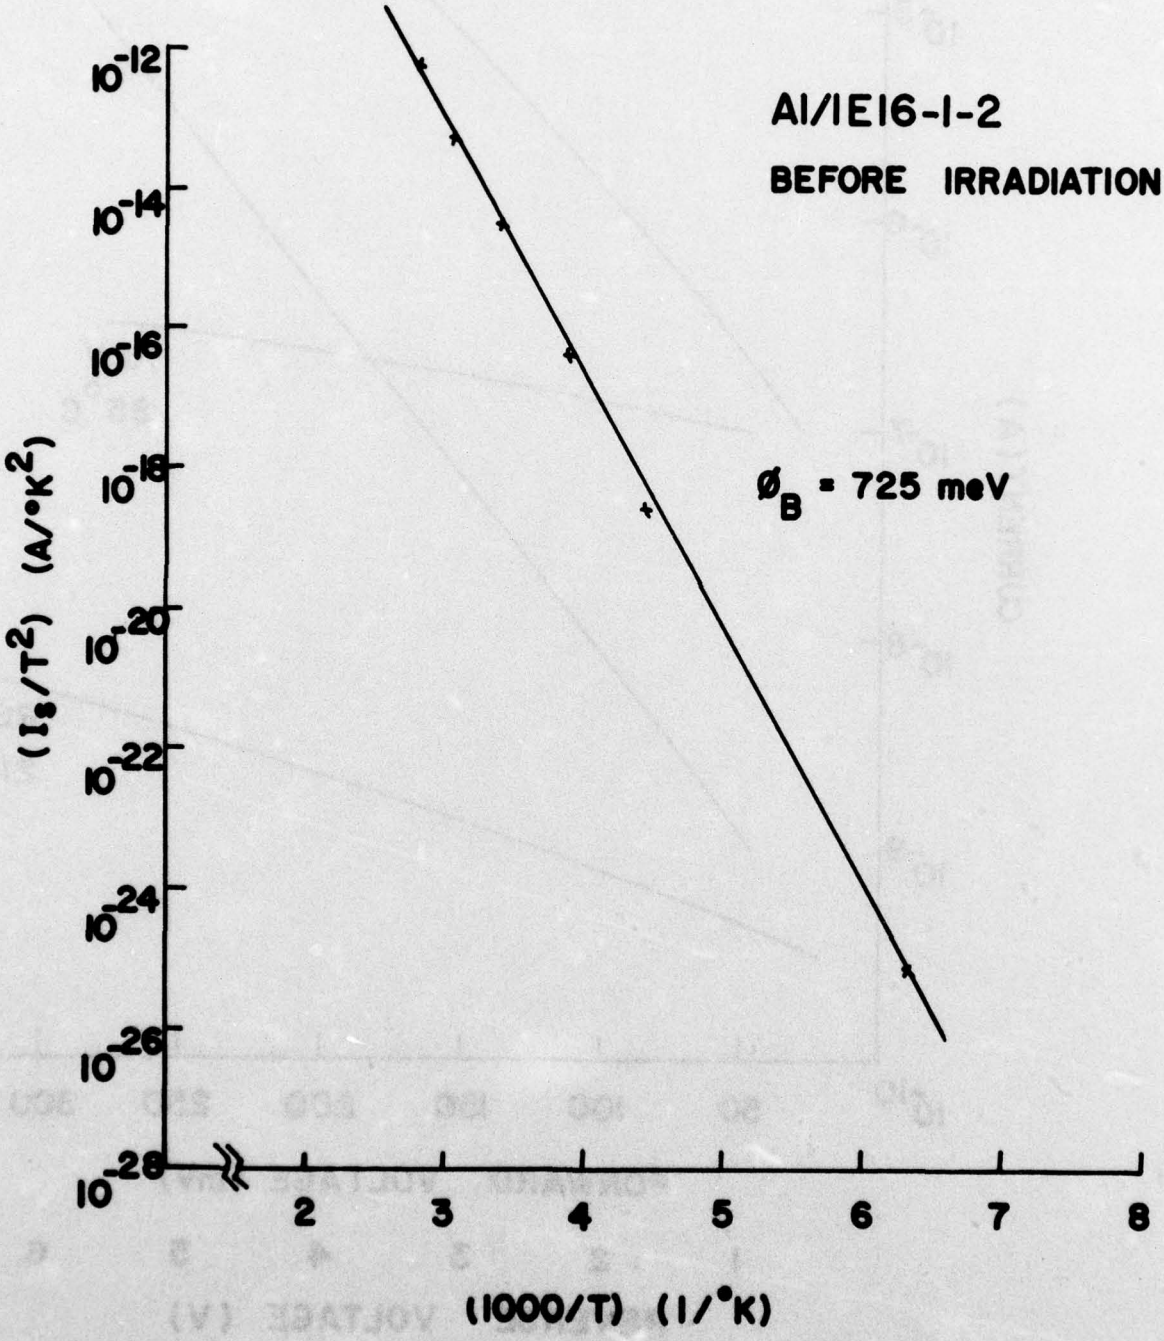


Fig. 2.4 Richardson plot of I_s/T^2 vs. 1/T of 1E16-1 before irradiation

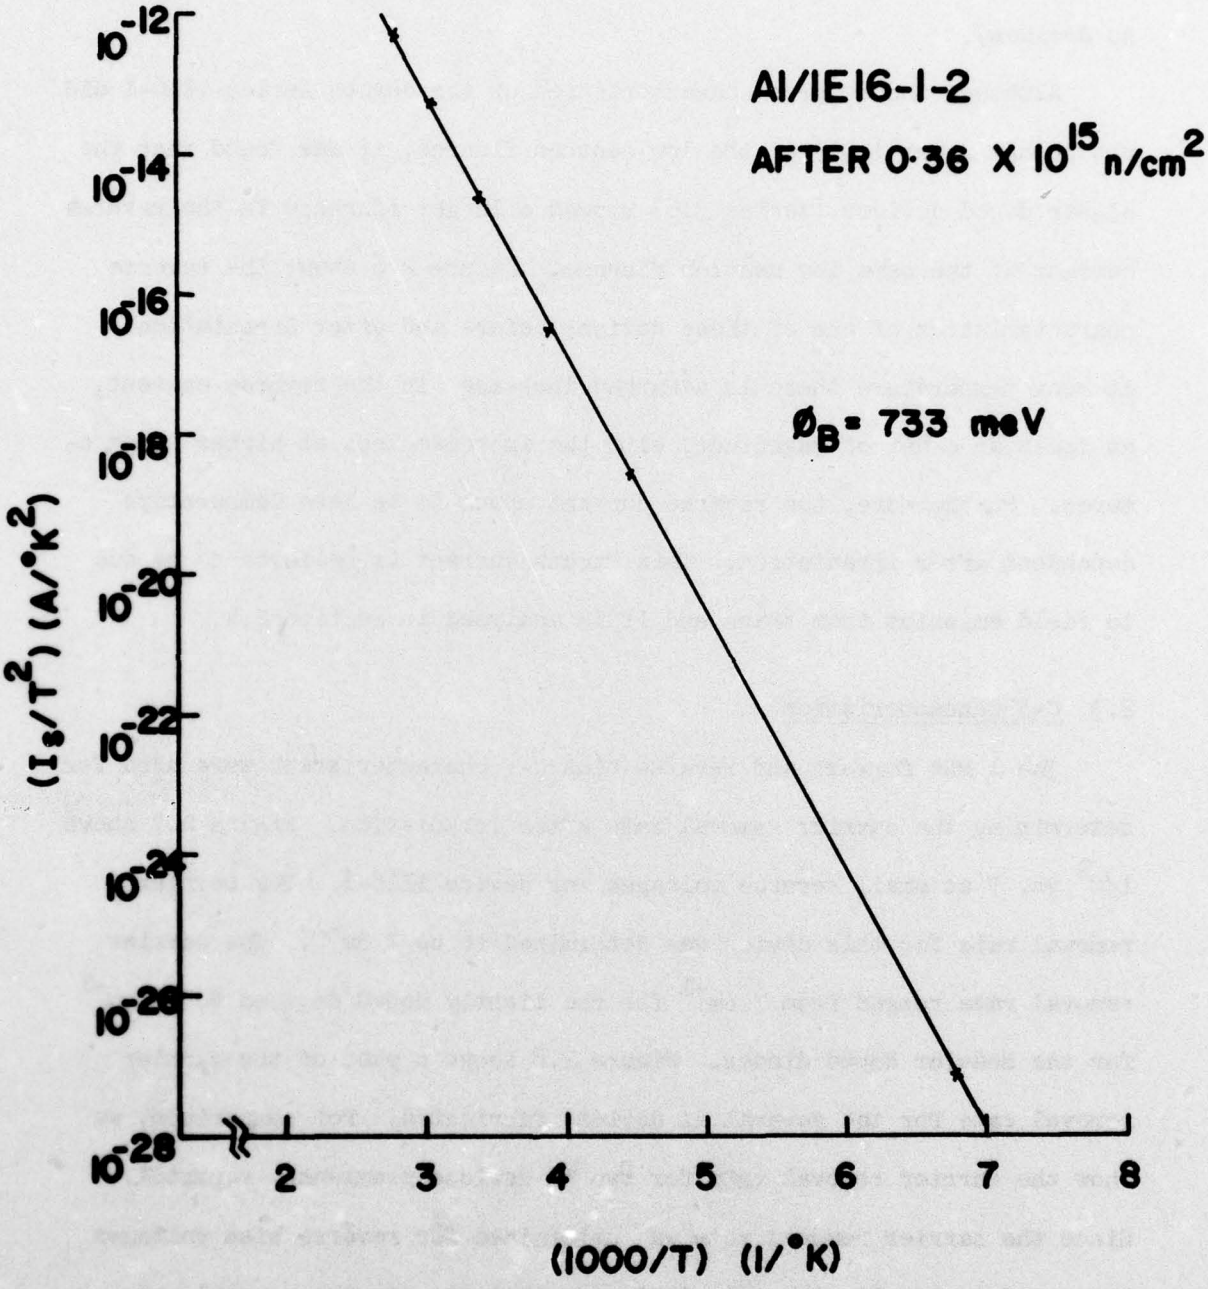


Fig. 2.5 Richardson plot of I_s/T^2 vs. 1/T of 1E16-1 after irradiation

barrier height of the Al devices (0.72 eV as compared to 0.9 eV for the Au devices).

Although the reverse characteristics of the device series 1E16-1 did not change appreciably at the low neutron fluence, it was found that the higher doped devices (series 316) showed a larger increase in the reverse current at the same low neutron fluence. Figure 2.6 shows the reverse characteristics of one of these devices before and after irradiation. At room temperature there is a marked increase in the reverse current, at least an order of magnitude, with the increase less at higher temperatures. Furthermore, the reverse current shows to be less temperature dependent after irradiation. This excess current is believed to be due to field emission from traps and it is analyzed in Section 2.4.

2.3 C-V Characteristics

The 1 MHz forward and reverse bias C-V characteristics were used for determining the carrier removal rate after irradiation. Figure 2.7 shows $1/C^2$ vs. V at small reverse voltages for device 1E16-1. The carrier removal rate for this device was determined to be 7 cm^{-1}. The carrier removal rate ranged from 7 cm^{-1} for the lightly doped devices to 13 cm^{-1} for the heavier doped diodes. Figure 2.8 shows a plot of the carrier removal rate for the several Al devices fabricated. For comparison, we show the carrier removal rate for two Au devices previously reported. Since the carrier removal rate was determined for reverse bias voltages between 0 to 1 volt, the data indicates that the carrier removal rate close to the metal-semiconductor interface depends upon the nature of the interface, although more data would be desirable to confirm this conclusion.

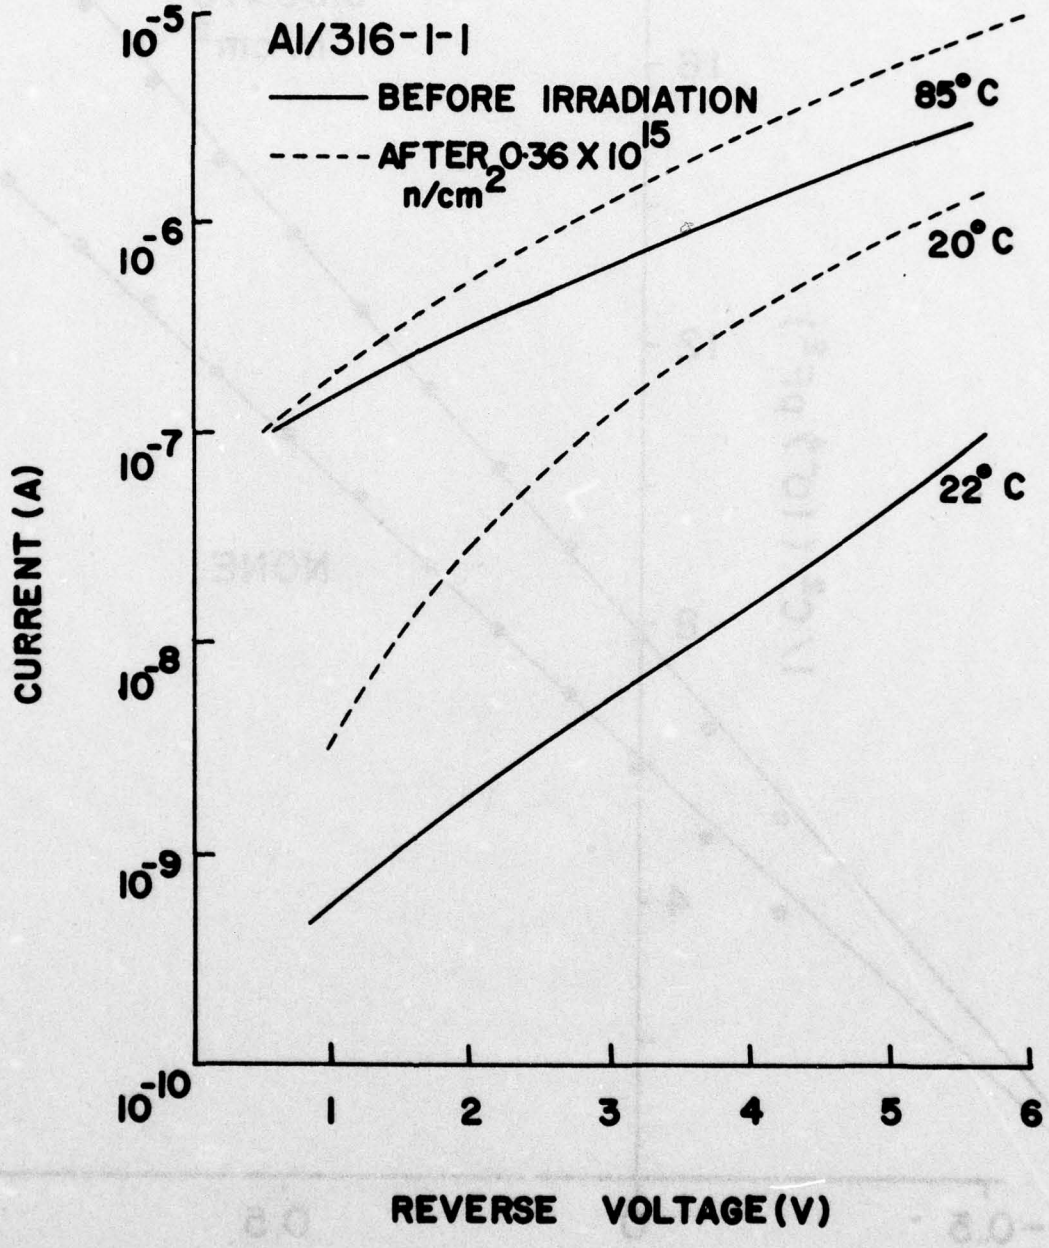


Fig. 2.6 Reverse bias I-V characteristics of 316 before and after irradiation

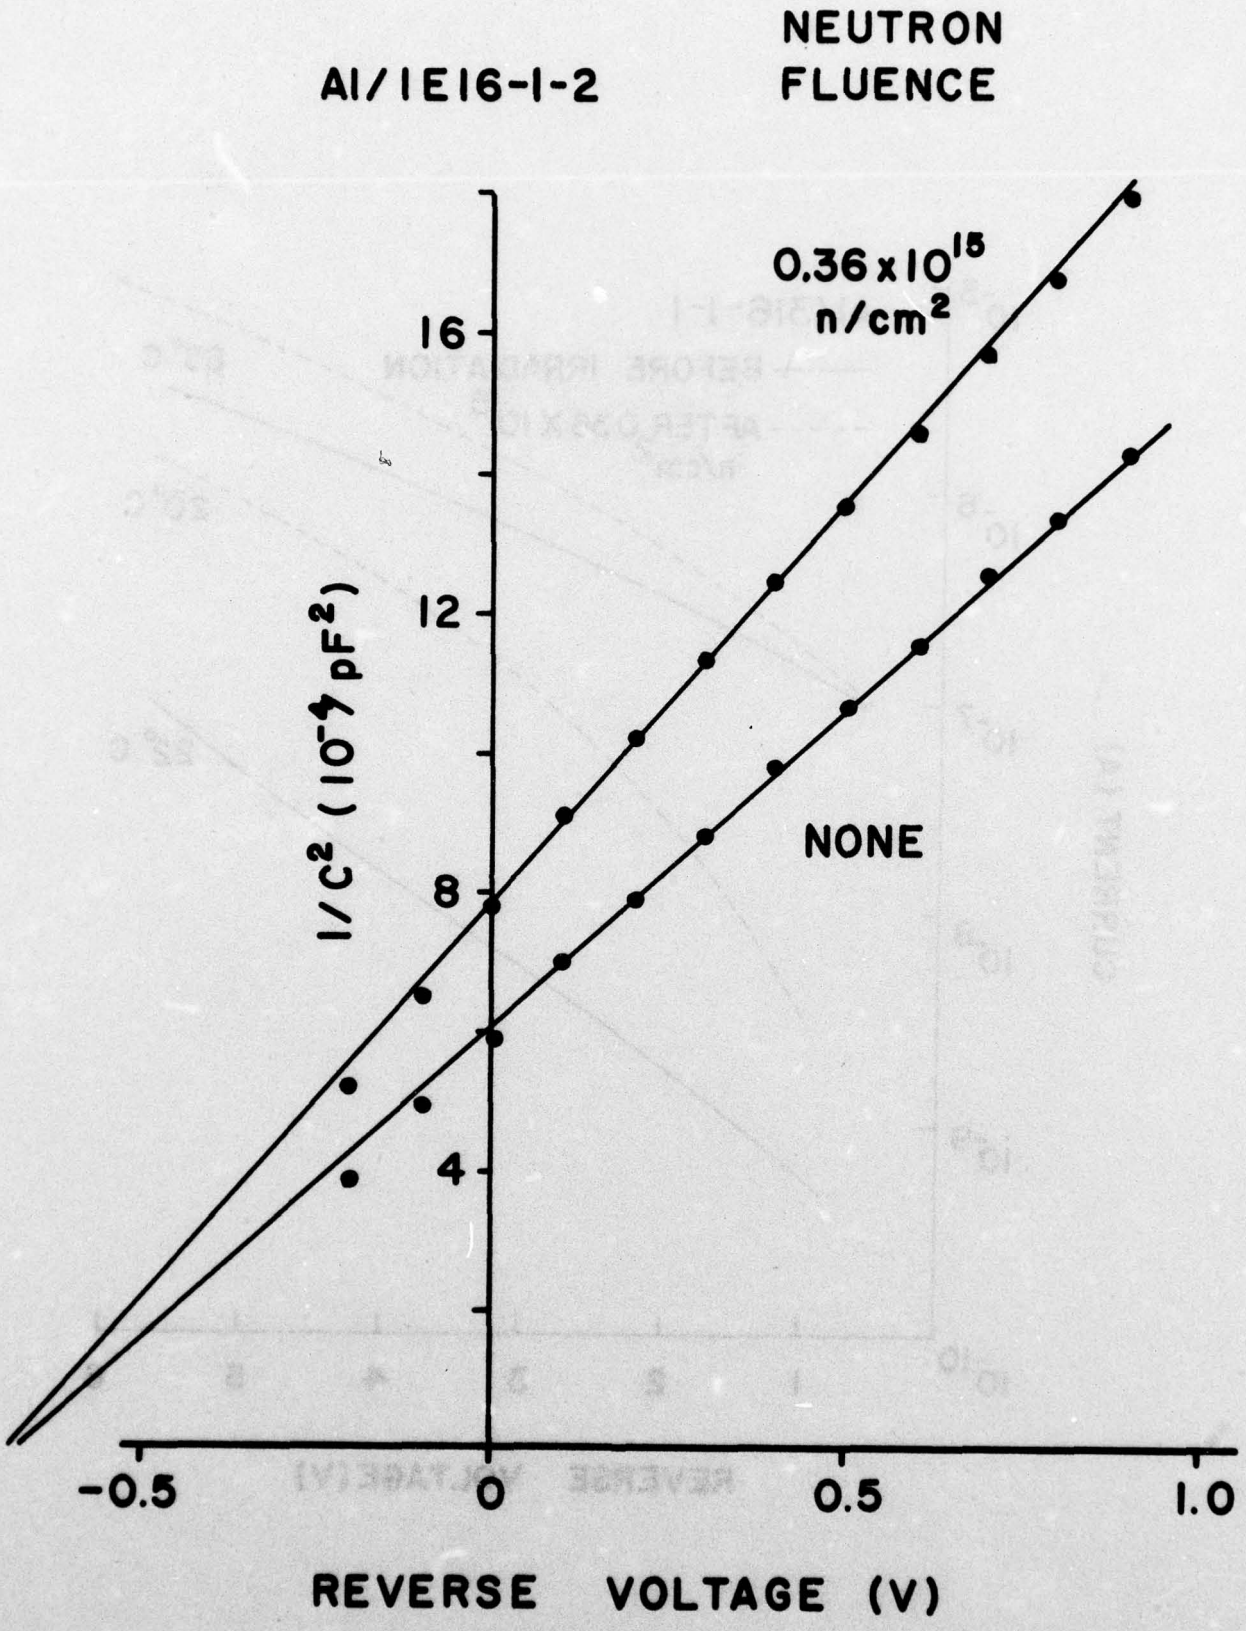


Fig. 2.7 $1/C^2$ vs. V near zero bias for 1E16-1 before and after irradiation

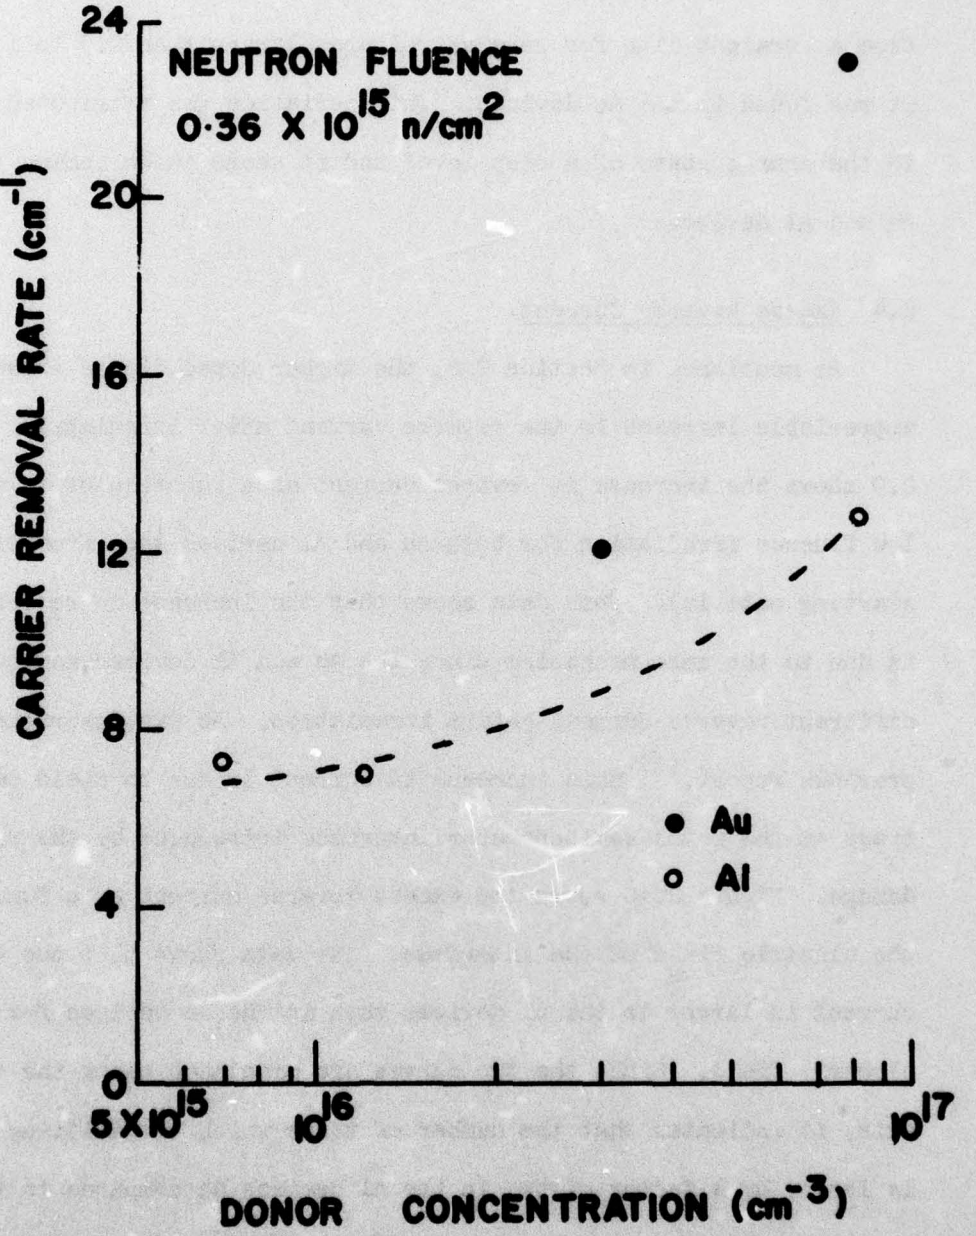


Fig. 2.8 Carrier removal rate as a function of free carrier concentration

The $1/C^2$ vs. V. plot for the 316 series of devices shows a deviation from a straight line for reverse voltages larger than 0.5 to 1 volt, as it was found in the Au devices. This deviation was attributed to a change in the charge state of a deep level and it seems to be common to both the Au and Al devices.

2.4 Excess Reverse Current

As mentioned in Section 2.2, the higher doped diodes showed an appreciable increase in the reverse current after irradiation. Figure 2.9 shows the increase in reverse current as a function of voltage after low fluence irradiation for both Au and Al devices made from similar starting material. This data shows that the increase in reverse current is due to the same mechanism since the Au and Al devices had quite different reverse current before irradiation. As was described in a previous report,[6] this increase in current is due to field emission from traps at the metal-semiconductor interface introduced by the radiation damage. Figure 2.10 shows the excess reverse current as a function of the electric field at the interface. The data shows that the excess current is larger in the Al devices than in the Au devices for the same electric field. Since the two curves are displaced along the current axis, it indicates that the number of traps which are emitting the carriers is larger by a factor of two in the Al devices as compared to the Au devices. The energy of the barrier ϕ_t for field emission for the Al devices was found to be very close to the barrier ϕ_t found previously in the Au diodes ($\phi_t \approx 0.3$ eV at room temperature).

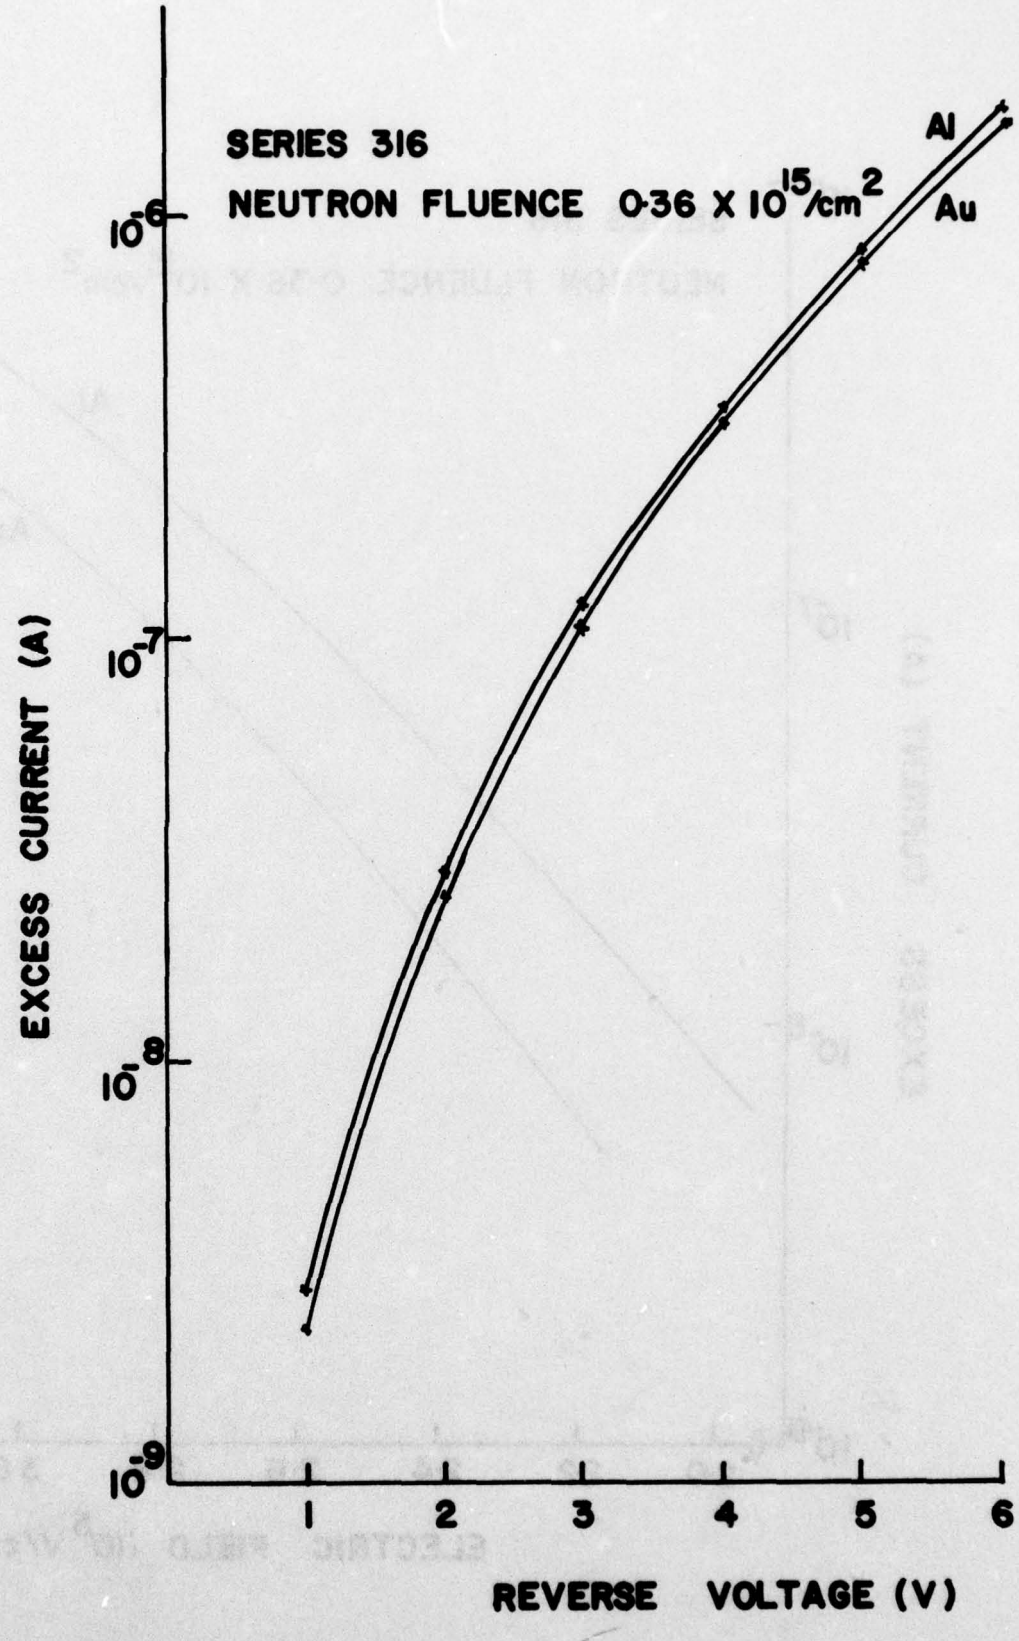


Fig. 2.9 Increase in reverse current as a function of voltage after irradiation

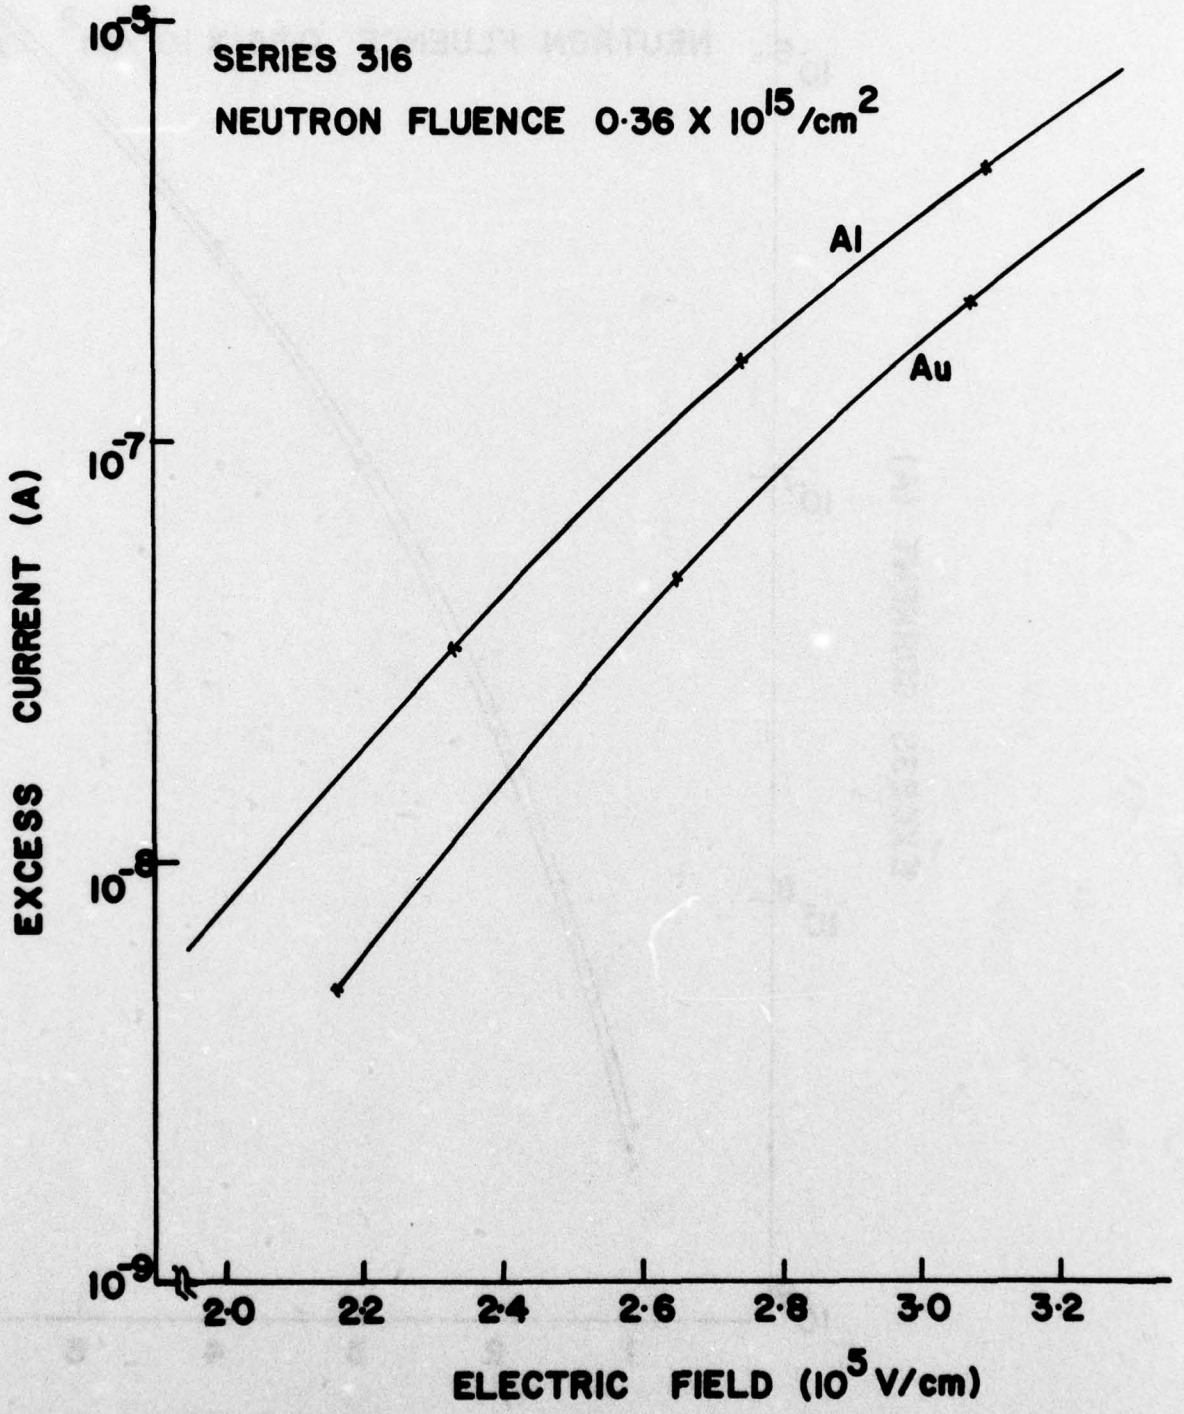


Fig. 2.10 Increase in reverse current as a function of peak electric field at the interface

Since the lowest doped diodes like the 1E16 series of devices did not show the increase in reverse current observed in the 316 series of devices, we conclude that it is necessary to have both neutron damage and donors in order to produce traps capable of increasing the reverse current by field emission. This appears to be more critical in the Al devices since the lower barrier height gives a larger reverse current before irradiation.

2.5 Density of Interface States

Using the I-V and C-V characteristics of the devices, we determined the interface state density before and after irradiation using the techniques described in a previous report.[6] A computer program developed for reducing the data to obtain the electric field at the interface, the change in barrier height and the density of interface state is given in Appendix I. Figure 2.11 shows the electric field at the interface E_s as a function of change in barrier height $\Delta\phi_B$, corrected for image force barrier lowering, before and after irradiation for device 1E16-1. The density of interface states N_{ss} as a function of $\Delta\phi_B$ is shown in Fig. 2.12 for the same device. The curves show the same features as the one previously found for the Au-GaAs devices. Before irradiation the N_{ss} is highly peaked at the zero bias Fermi level. After irradiation the distribution is less peaked and of reduced value.

2.6 Transient Ionizing Radiation Results

Transient ionizing radiation photocurrent measurements were taken with the aluminum devices in an evacuated chamber, with results in

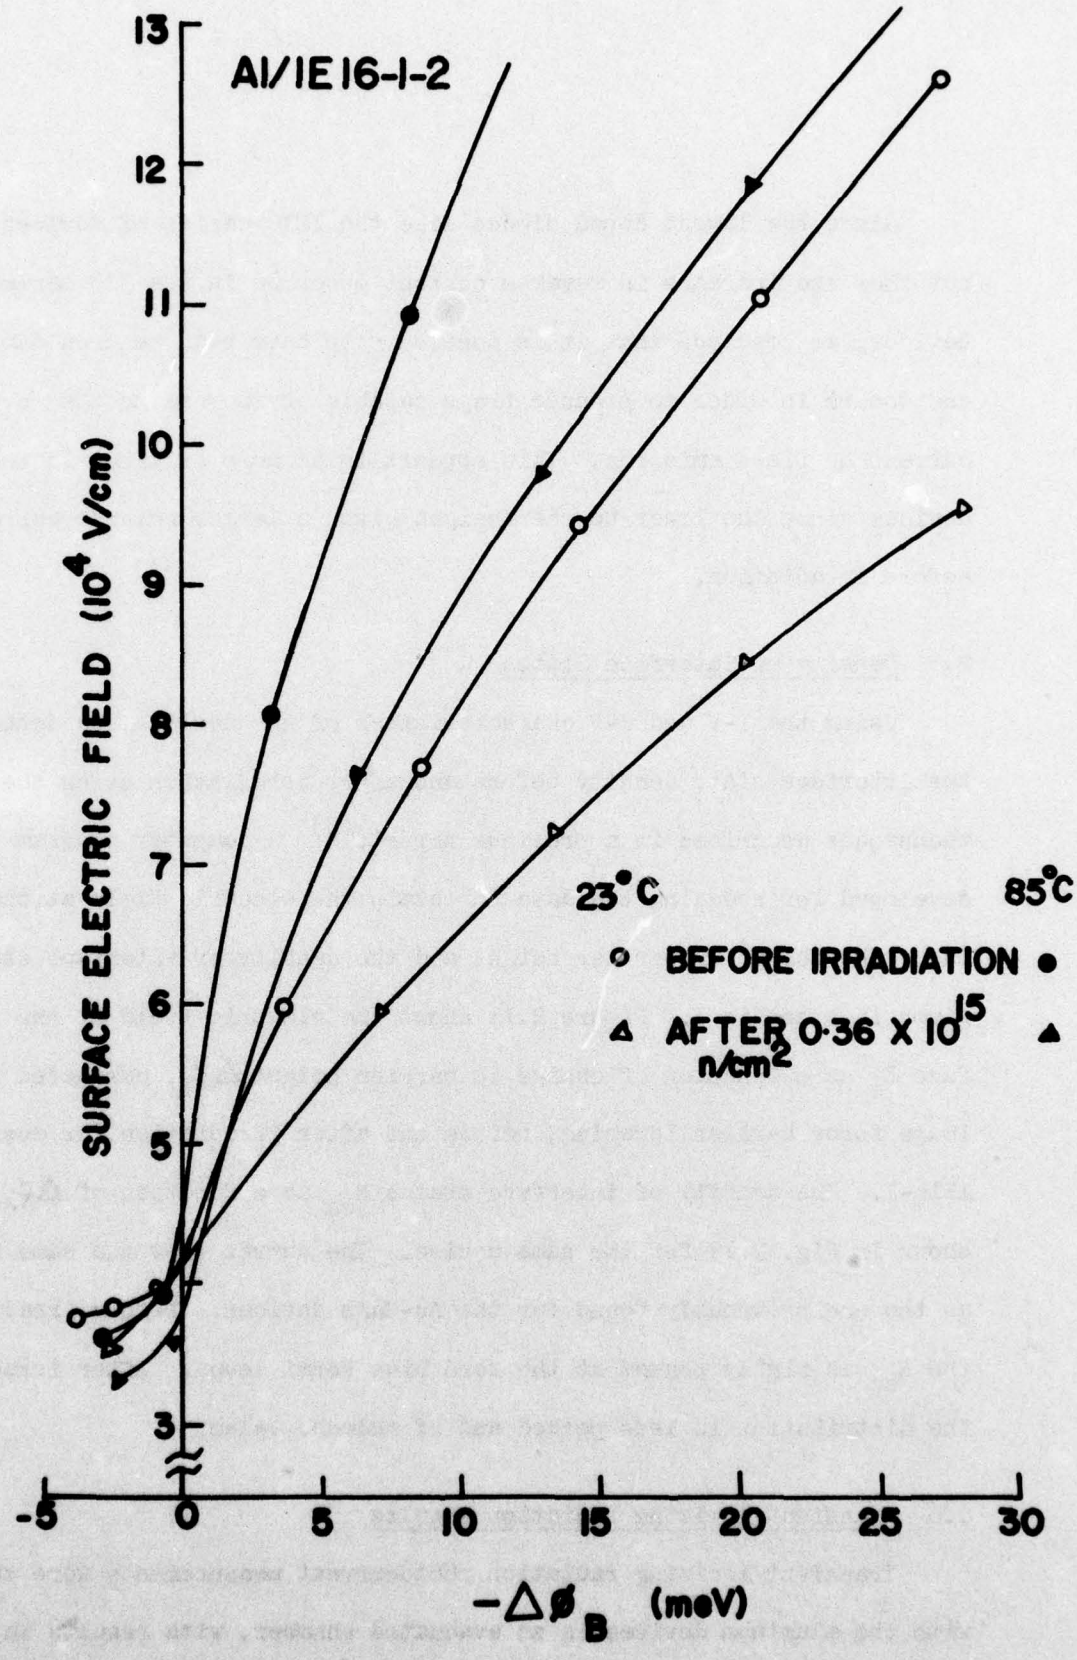


Fig. 2.11 Peak electric field at the interface as a function of change in barrier height

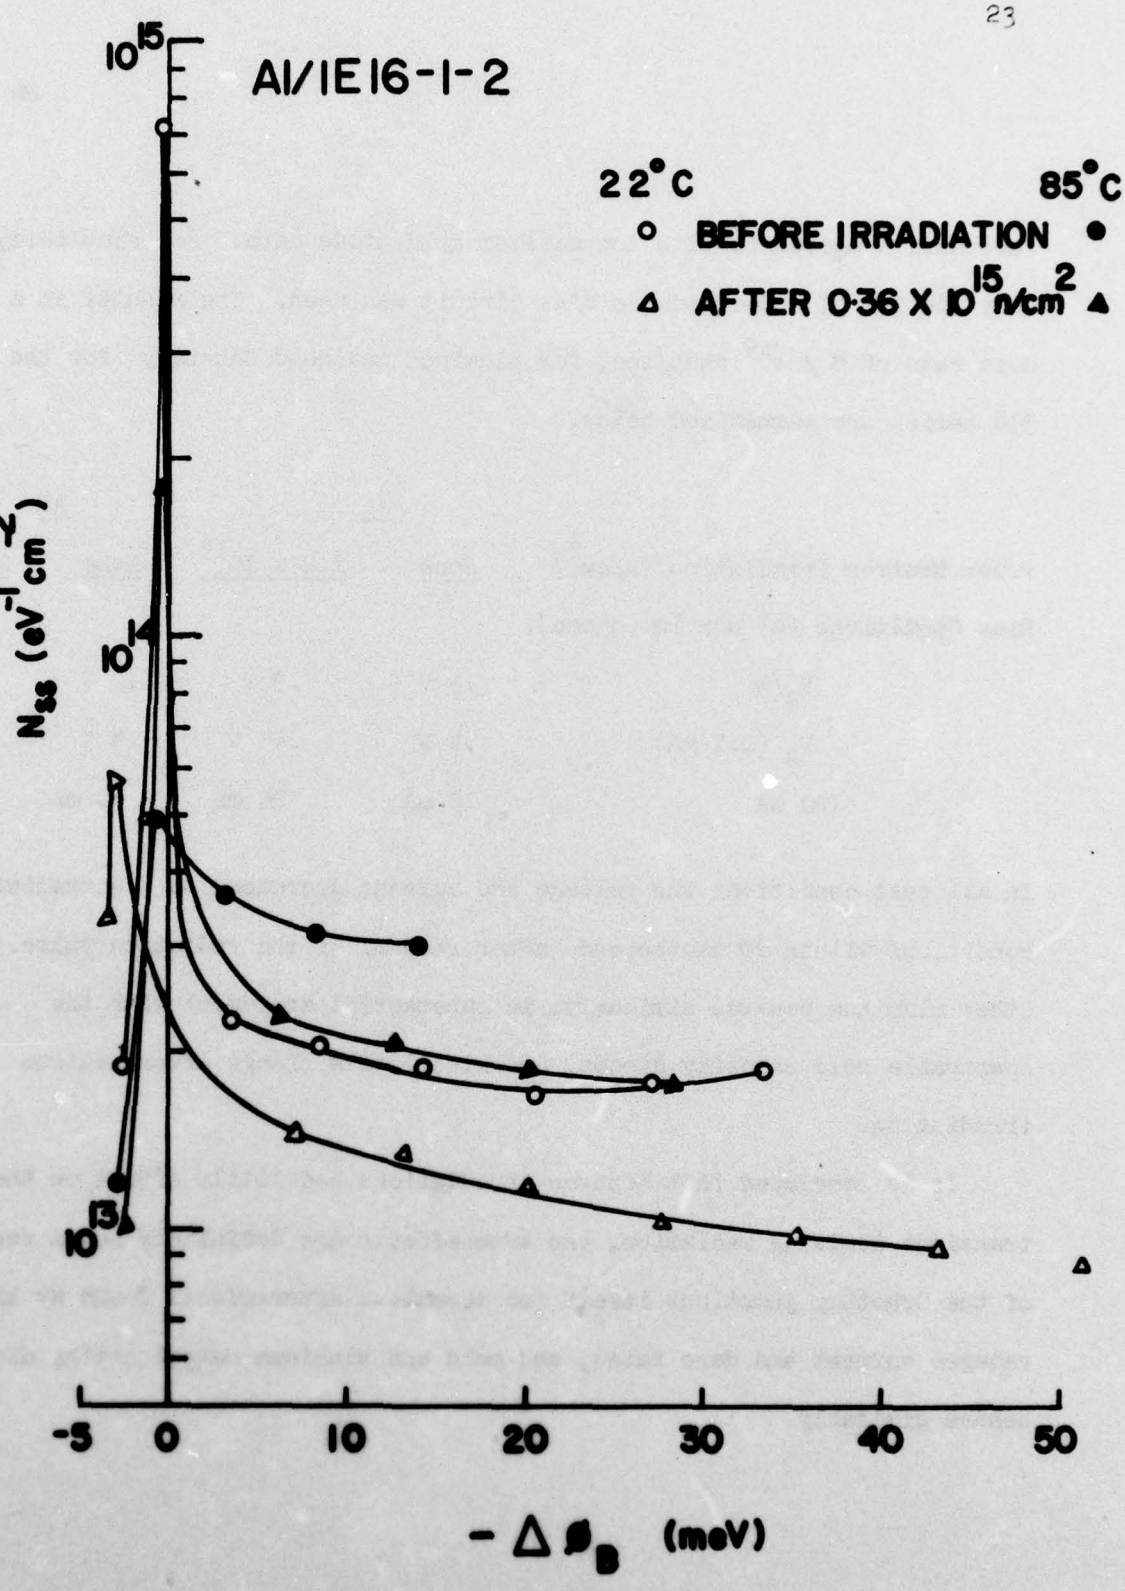


Fig. 2.12 Density of interface states before and after irradiation as a function of change in barrier height

substantial agreement with the earlier gold diode data. For simplicity, only the low 47 ohm impedance bias circuit was used. The results at a dose rate of 8×10^9 rads/sec. for aluminum and gold Schottky for the 316 series are summarized below.

	Au		Al	
Prior Neutron Irradiation (n/cm^2)	None	2.2×10^{15}	None	2.2×10^{15}
Bias Conditions (47 ohm impedance)				
$V_B/3$	.3 V	.3 V	.3 V	.3 V
V_B (0.1 mA)	.4 V	.45 V	.4 V	.4 V
100 mA	10 mA	20 mA	20 mA	20 mA

In all test conditions the voltage and current decreased to preirradiation conditions within 20 nanoseconds after removal of the radiation pulse. Other aluminum behaved similarly, in substantial agreement with the comparable gold Schottky diodes, and with little change after neutron irradiation.

It is concluded that neutron irradiations had little effect on the transient ionizing radiation, the aftereffects are definitely not a result of the Schottky junctions itself (no anomalous aftereffects found at high reverse current and dose rate), and gold and aluminum GaAs Schottky diodes behave similarly.

3.0 IMPATT DIODE AFTEREFFECTS

Although many of the effects of transient ionizing radiation on IMPATT oscillators are well documented,[11] anomalous aftereffects have been occasionally reported[5,12] that are not well understood. If these solid state microwave sources are to be used in reliable radiation hardened systems, the aftereffects must be controlled. The term "after-effects" is used whenever the oscillator does not regain preirradiation characteristics following the ionizing radiation pulse, even though irreversible device changes need not occur. Unlike previous investigations, we have been able to control the occurrence of these aftereffects by RF circuit tuning and by bias circuit tuning during this program. Although necessary and sufficient conditions for the aftereffects are still not known, these measurements of the relationship between IMPATT diode, RF cavity and bias circuit indicate that transient ionizing radiation can be detrimental to some IMPATT oscillators at dose rates above 2×10^9 rads/sec. These experimental results are a key contribution to the understanding of aftereffects in IMPATT diodes as well as the eventual control of the phenomenon.

3.1 Devices Tested and Test Set-up

In this work 500 milliwatt silicon and gallium arsenide X-band IMPATT diodes were evaluated, with typical diode characteristics given in the table below:

Diode No.	Diode Type	V_{br} (volts)	C_{br} (pfd)	I_{max} (mA)
301B	Si-double epi	78	0.76	93
22A4	GaAs-diffused	64	1.26	100
1B10	GaAs-Schottky	49	0.83	105

One or two devices of each type was tested as described below, although previous experience with these devices[11] indicates that the devices are representative of those commercially available.

The RF test set-up is similar to that described in detail previously.[6,11] The disc-and-post type waveguide cavity was tuned by changing the length of a sliding short "behind" the diode (additional tuning by changing disc diameter was also used but kept fixed during the testing reported). The bias circuit impedance was adjusted by inserting lengths of coaxial cable between the diode and the bias box (consisting of passive circuit components used to provide the proper DC resistance and to allow diode voltage monitoring during the irradiation pulse). With this variable length of cable, the bias circuit impedance at the diode terminals was adjustable in the frequency range of 10 to 100 MHz, where bias circuit oscillations usually occur.[13] In all these experiments, the circuit parameters were carefully adjusted until the RF and frequency of oscillation varied smoothly with bias current while maintaining a clean RF spectrum, that is, the IMPATT oscillators were well-behaved prior to irradiation.


3.2 Influence of Bias Circuit

In a recent scientific report,[6] the possible effect of bias circuit

impedance on aftereffects was described conceptually. The approach followed that of Brackett[15] and indicated the observed sensitivity of GaAs IMPATT diodes to aftereffects. In these experiments we controlled the bias circuit impdance by varying the length of cable between the 325 ohm bias network and the 60 pF bypass capacitor at the diode. The bias circuit impedance as a function of frequency is shown in Fig. 3.1 along with the impedance locus of a typical GaAs IMPATT. The length of cable in the bias circuit obviously causes the GaAs IMPATT to be susceptible to bias circuit oscillations. The test results, shown in detail in Section 3.3, demonstrate that the bias circuit is NOT a principal cause of the aftereffects. However, improper bias circuit impedances, as described recently,[6] combined with conditions permitting aftereffects can lead to device failure.

3.3 Influence of RF Circuit

The disc-and-post type waveguide cavity has been used throughout these programs because of the ease of IMPATT diode tuning. The mechanical tuning is accomplished principally by varying the disc diameter and the length of the sliding short "behind" diode-loaded disc. The tuning allows a conjugate match between the diode and circuit impedances to be achieved, a necessary condition for stable oscillations. In addition, the Q of the circuit at the fundamental frequency and the circuit impedance at harmonic frequencies are changed as the tuning adjustments are varied. In this section, we report on measurements taken with only the sliding short position varied (by about a half guide wavelength at the frequency of oscillation), i.e., the disc diameter is unchanged.

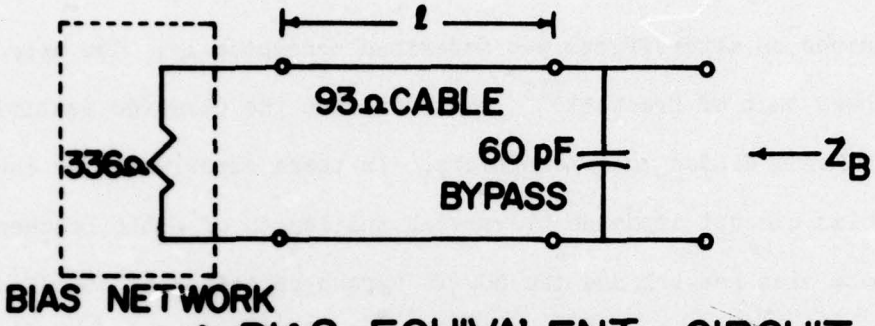


A. BIAS EQUIVALENT CIRCUIT

● —— Bias Impedance(4 ft cable)

x —— Bias Impedance (1 ft cable)

▲ —— Brackett Ga As IMPATT Impedance All frequencies in MHz

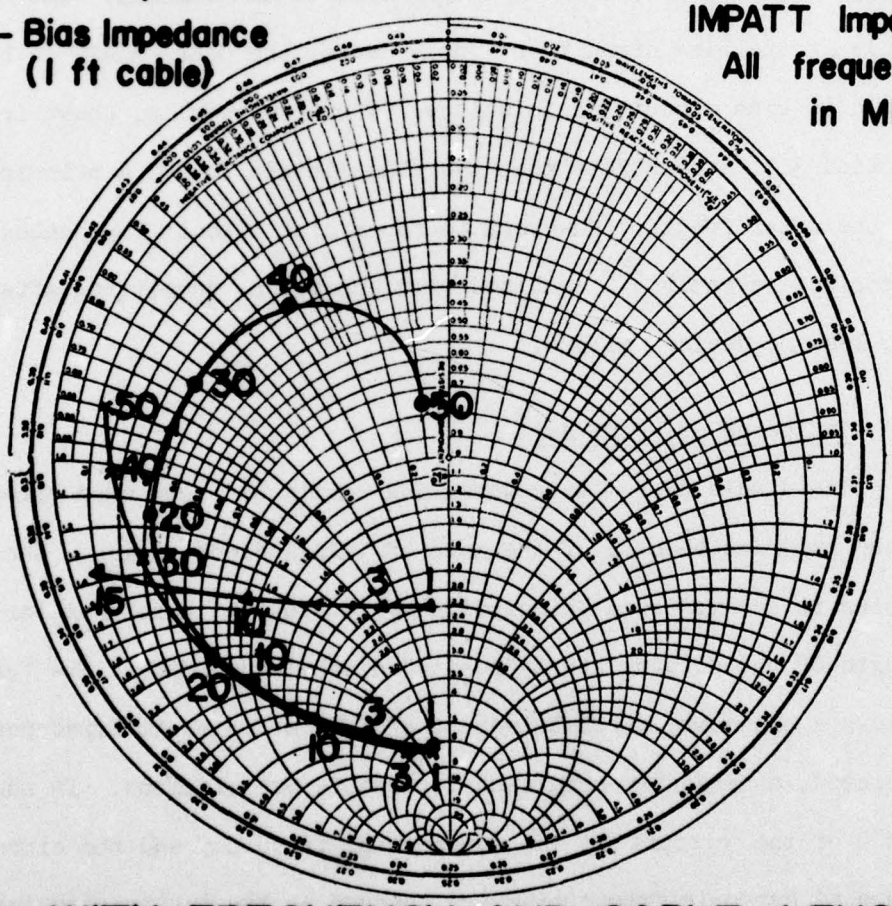

B. Z_B WITH FREQUENCY AND CABLE LENGTH AS PARAMETERS(Brackett GaAs IMPATT superimposed)

Fig. 3.1 IMPATT diode bias circuit impedance as a function of frequency

The gallium arsenide Schottky diode (1B10) was tuned with the sliding short close to the diode with the oscillator being well-behaved as described in Section 3.1 (short position .750 cm). Aftereffects did not occur at the highest dose rate used, 7×10^9 rads/sec. as shown in Fig. 3.2. The RF power reduces to near zero during the radiation pulse due to the effective leakage current generated by the ionizing radiation and cavity ionization. All microwave testing was done with air-filled cavities, the difference between evacuated and air-filled cavities being previously reported.[11] Although there is a small time delay required before the RF amplitude builds up to the steady state value after the radiation pulse, the RF power clearly returns to its preirradiation value (as does the RF frequency, bias voltage and other electrical characteristics). This lack of aftereffects was observed for all cable lengths inserted in the bias circuit at this sliding short position, indicating that the bias impedance could not induce the aftereffects.

After extending the sliding short by one-half guide waveguide, almost identical preirradiation RF tuning was observed. However, after the irradiation pulse the RF power reduced from 280 mW to 120 mW while the frequency increased from 9.54 to 9.95 GHz and the bias voltage increased by 0.7 volt. The RF power change is shown in Fig. 3.3A and the bias voltage change in Fig. 3.4A. The slight increase in bias voltage after the radiation pulse (compared to the preirradiation value) is consistent with the lower amplitude of RF oscillation. With a 5 foot coaxial cable inserted between the diode and the bias box, 25 MHz bias circuit oscillations were observed in addition to the power and frequency


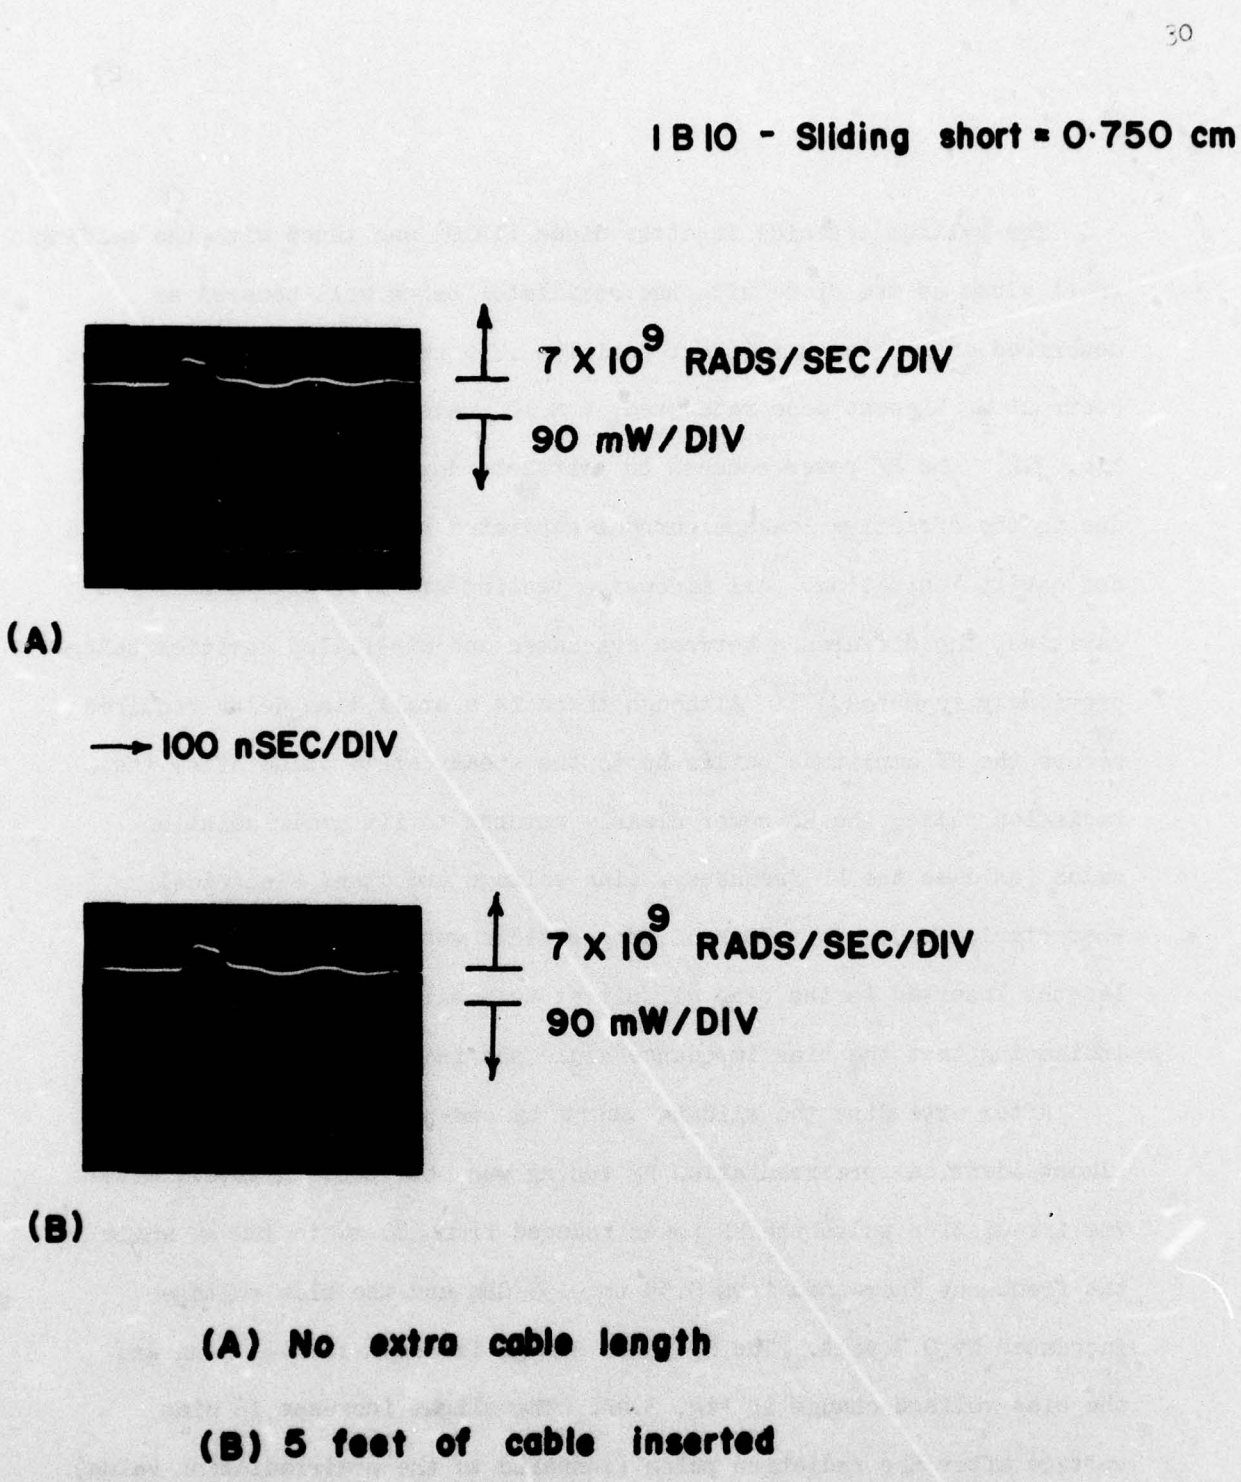


Fig. 3.2 RF power of GaAs Schottky tuned without aftereffects

A. No extra cable between diode and bias box

B. Five feet of cable inserted

IB 10 - Sliding short = 2·880 cm

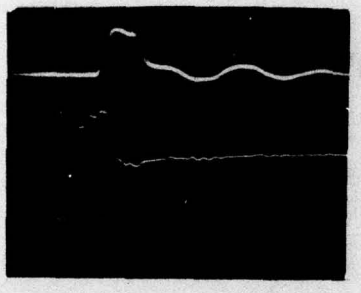


7×10^9 RADS/SEC/DIV

90 mW/DIV

(A)

→ 100 nSEC/DIV

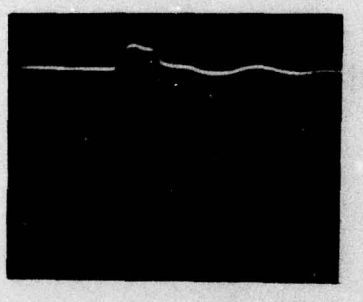

7×10^9 RADS/SEC/DIV

90 mW/DIV

(B)

(A) No extra cable length

(B) 5 feet of cable inserted

Fig. 3.3 RF power of GaAs Schottky tuned with aftereffects

A. No extra cable between diode and bias box

B. Five feet of cable inserted

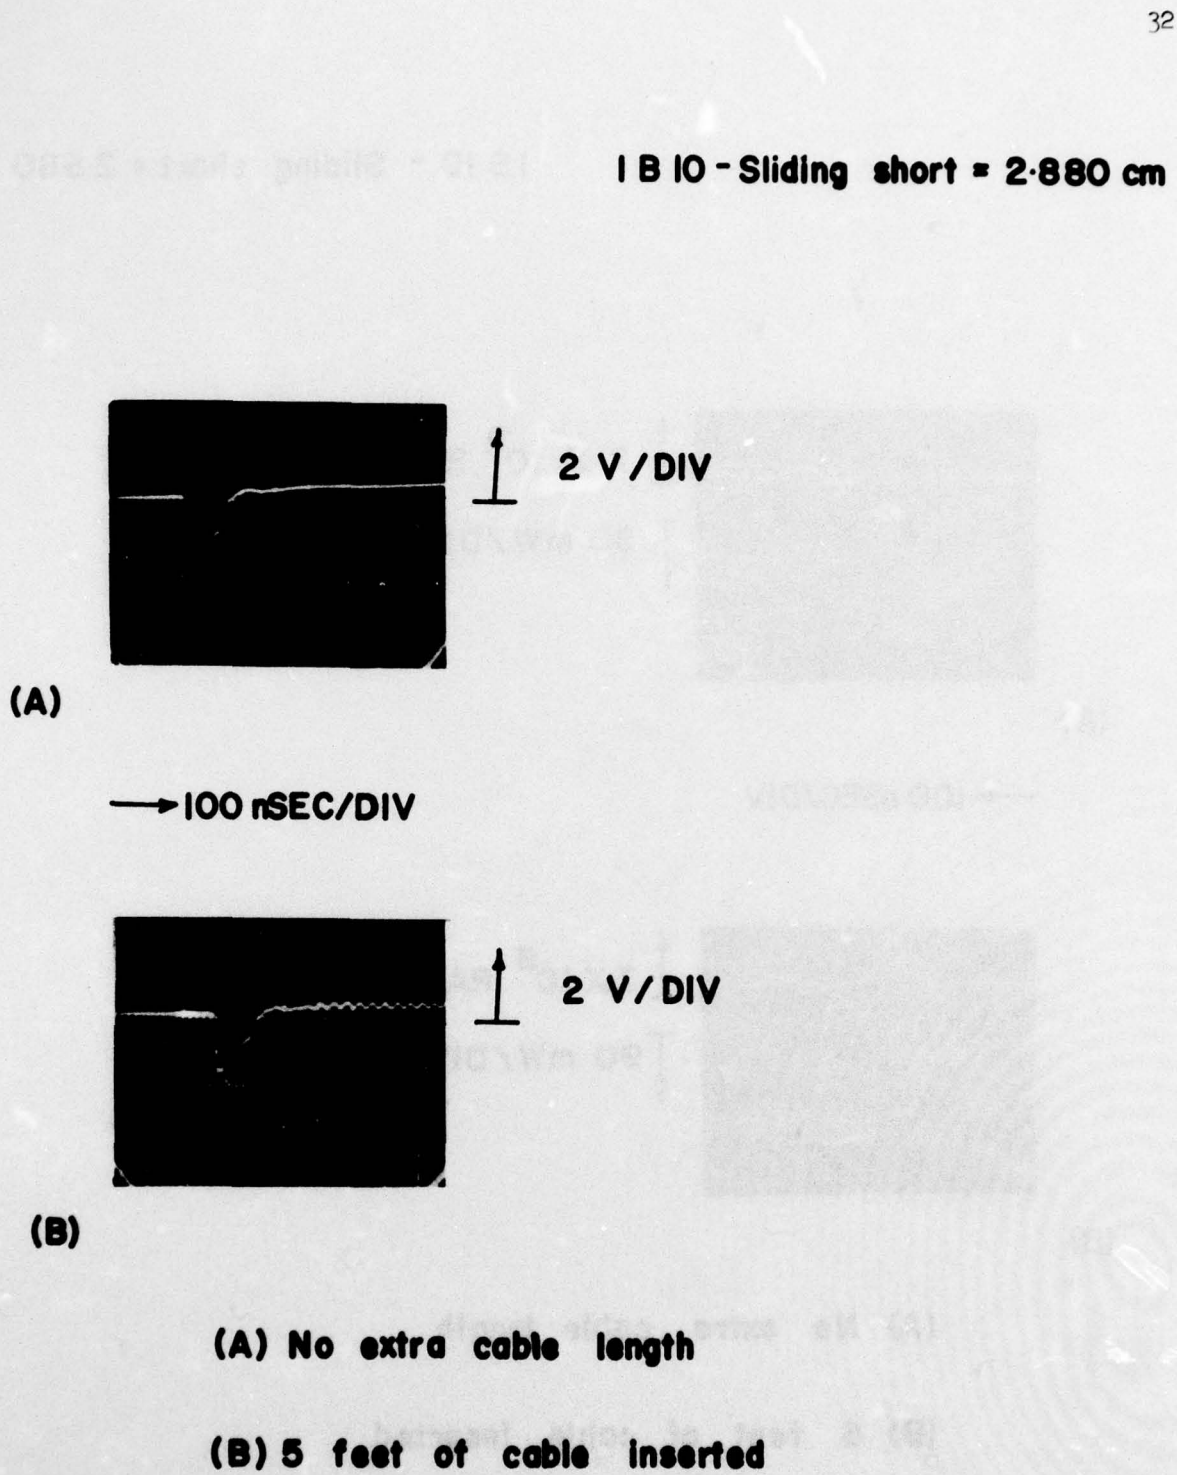


Fig. 3.4 Bias voltage of GaAs Schottky tuned with aftereffects

A. No extra cable between diode and bias box

B. Five feet of cable inserted

change. The bias oscillations are apparent in the RF power photograph shown in Fig. 3.3B, as well as in the diode voltage photographs in Fig. 3.4B. In addition, the classic bias oscillation spectrum was observed after radiation using a spectrum analyzer. The spectrum was "clean" otherwise and was not noisy with, or without, the bias circuit oscillations.

In all cased where aftereffects were observed, the original RF characteristics could again be obtained by lowering the bias current. In particular, there were no diode failures as sometimes reported.[5] It should be emphasized that (1) the RF power and frequency tuned smoothly with bias current while maintaining a clean spectrum prior to irradiation at all test conditions used and (2) these irradiation aftereffects could then be reproduced without difficulty. The aftereffects were obtained reproducibly with preirradiation RF powers greater than 200 mW and dose rates greater than 2×10^9 rads/sec.

Similar RF and bias circuit tuning and irradiation testing was done with the GaAs diffused diode (22A4) and the Si diffused diode (301B). Although less dramatic and potentially less harmful, aftereffects (RF power reduction and frequency change) could be observed if (1) the diode bias current was set only slightly below the value for power saturation and/or spectrum deterioration and (2) high dose rates ($\sim 8 \times 10^9$ rads/sec) were imposed. The GaAs diffused diode was more prone to aftereffects than the Si diffused diode, although the aftereffect susceptibility was much greater in the GaAs Schottky IMPATT than either of the diffused diodes. The dependence of the aftereffects upon sliding short position


was observed, but bias circuit oscillations were not observed for these diodes. In fact, the extra cable length had little effect on these after-effects.

At the power levels near power saturation and at high dose rates, aftereffects in these two diffused diodes were sensitive to bias current level and tuning. As shown in Figures 3.5 and 3.6 for the GaAs diffused and Si diffused diodes, aftereffects were not observed with the extra cable length for the particular test conditions shown. This data should not be interpreted as implying that the cable tends to quench the aftereffects (additional data not shown confirms these conclusions), but only that (1) the occurrence of aftereffects was sensitive to circuit parameters near power saturation and at high dose rate and (2) the bias circuit impedance locus in the 10-100 MHz frequency range is not a principal cause of the aftereffects.

In addition, the data with the Si and GaAs diffused diodes confirms the IMPATT diodes are prone to the aftereffects with the sliding short far from the diode in the disc-and-post type RF circuit. Less extensive testing performed at sliding short positions near the diode with diodes 22A4 and 301B did not yield aftereffects under similar drive levels and dose rates.

3.4 Phenomenological Explanation of Results

We have demonstrated experimentally that (1) bias circuit instability is not a principal cause of the aftereffects and (2) aftereffects depend upon "second order" effects of the RF cavity (i.e., on sliding short position of the waveguide disc-and-post cavity either though similar

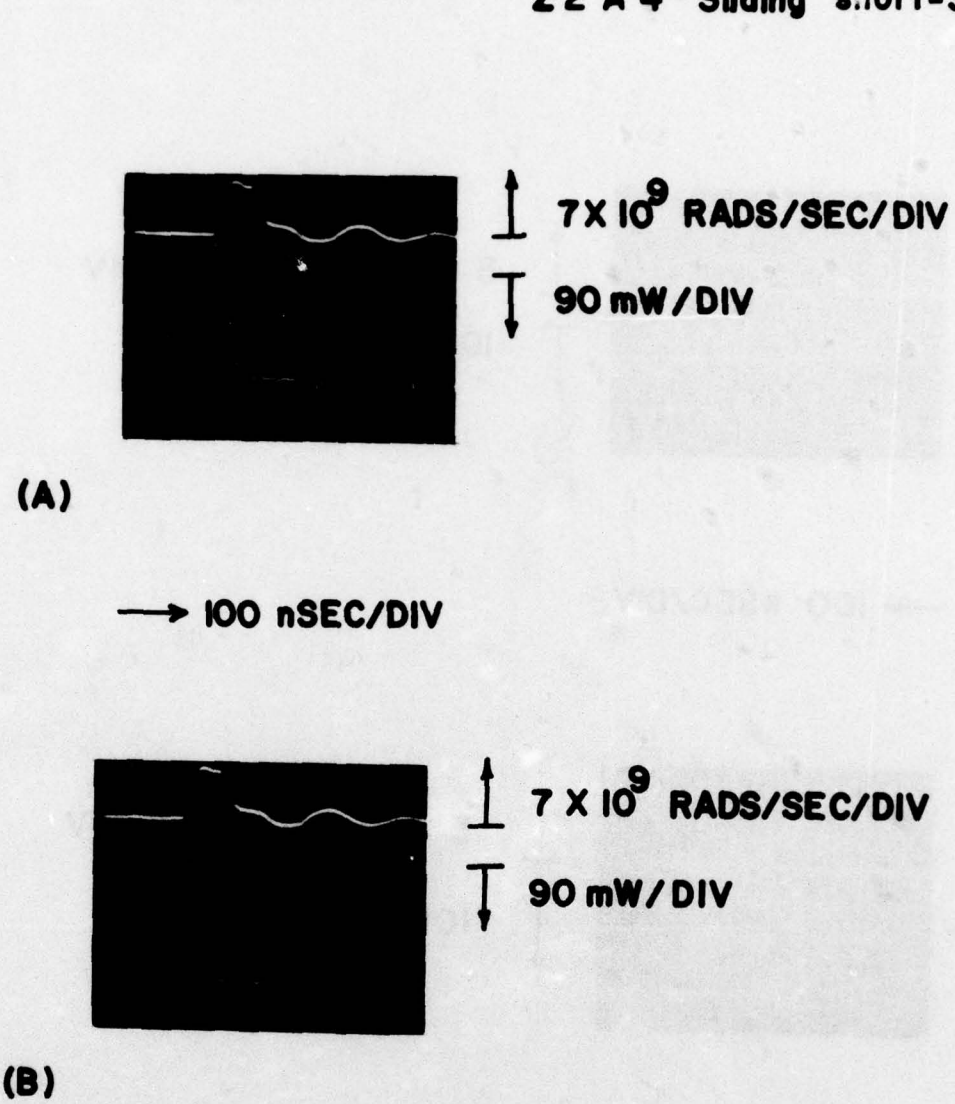

(A) No extra cable length


(B) 5 feet of cable inserted

Fig. 3.5 RF power of GaAs diffused tuned with aftereffects

A. No extra cable between diode and bias box

B. Five feet of cable inserted

301 B - Sliding short = 2·150 cm




5 X 10^9 RADS/SEC/DIV

100 mW/DIV

(A)

→ 100 nSEC/DIV

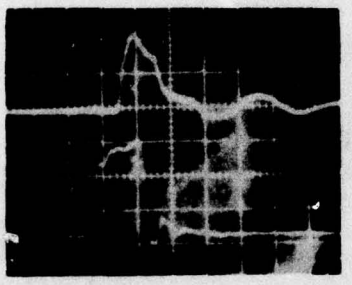

5 X 10^9 RADS/SEC/DIV

100 mW/DIV

(B)

(A) No extra cable length

(B) 5 feet of cable inserted

Fig. 3.6 RF power of Si tuned with aftereffects

A. No extra cable between diode and bias box

B. Five feet of cable inserted

preirradiation oscillator characteristics are observed). Three reasonable explanations can be put forth which have been observed previously in IMPATT oscillators.

1. parametric stabilities as described by Hines[14] and Schroeder.[15]
2. frequency jumping as described originally by Slater[16] and recently by Kurokawa.[17]
3. harmonic effects as described by Mouthaan[18] and Brackett.[19]

In this section we present a brief description of each effect and discuss the feasibility of each phenomenon being a principal cause of the after-effects with transient ionizing radiation.

Parametric instabilities are generally ascribed to the nonlinear inductive reactance effect in the avalanche process. Besides the main oscillator output (considered as a pump in theoretical treatments[14]), a low level auxiliary signal or noise is required. Due to the nonlinear inductance, the usual parametric effects (normally desired with the nonlinear capacitance of a varactor such as mixing, up conversion, etc.) occur. Since the waveguide disc-and-post type waveguide cavity is still not well characterized the stability requirements developed by Schroeder[15] cannot be applied directly. However, parametric instabilities are usually accompanied by auxiliary spectral responses and/or noisy spectrum. Since the RF spectrum observed after the irradiation induced aftereffects was clean, i.e., the main spectrum line was narrow and there were no auxiliary responses (except for the classic bias oscillation spectrum with the GaAs Schottky and the 5 foot cable in the bias circuit) across the band

(8.2-12.4 GHz), we conclude that parametric instabilities are an improbable cause of the aftereffects.

Frequency jumping is usually a result of the diode impedance and the microwave circuit locus intersecting in more than one stable operating point. As a result, the actual operating point depends upon the history of the oscillator.[16,17] In the case of interest, the circuit impedance locus is expected to be a stronger function of frequency as the sliding short is positioned further from the diode (higher Q circuit). The device impedance is known to be dependent upon level of oscillation and leakage current as required. When the oscillator is normally tuned, the bias current is slowly increased, and as required in the tuning procedure, no frequency or power jumps occur. However, after the irradiation pulse the leakage current is rapidly decreased[10] and the circuit Q is rapidly increased (air ionization decay) so that the RF amplitude builds up differently than in the preirradiation tuning and a different level of operation is possible. Network analyzer measurements of the waveguide cavity from the diode terminals indicate a classic looping circuit impedance confirming the plausibility of this explanation.

The effect of higher harmonics, in particular the second harmonic, has been considered by Mouthaan[18] and Brackett[19] among others. Harmonic content is expected to increase with drive level and one can easily show that the phasing of any harmonic of significant amplitude, particularly the second, can effect the power output.[18] The conditions developed in the literature are difficult to invoke without a detailed equivalent circuit at the fundamental and harmonic frequencies. Network analyzer

measurements up to 18 GHz (near the second harmonic frequency) indicate a difference between the two sliding short positions. However, accurate characterization is difficult and has not been accomplished.

In summary, either (1) frequency jumping due to multiple stable operating points or (2) higher harmonic phasing changes is expected to be a principal cause of the aftereffects. Additional testing, with different diodes and cavities, is needed to completely characterize the mechanism.

3.5 Conclusions

From these experiments and our earlier work[5,6] we have concluded the following:

1. The principal cause of the aftereffects is a device-circuit interaction and is related to the RF circuit impedance locus at the fundamental frequency[16] and/or the harmonic loading impedance at the diode.[18]
2. The principal cause of the aftereffects is NOT the bias circuit impedance causing bias circuit oscillations,[13] although it is believed that improper bias circuit impedance combined with aftereffects can cause diode failure with pulses of ionizing radiation.[6]
3. The GaAs Schottky diode is more prone to the aftereffects, with the occurrence at power levels above 200 mW and dose rates above 2×10^9 rads/sec. in the diode tested. The aftereffects in the Si and GaAs diffused diodes only occurred with the diode operated slightly below power saturation and/or spectrum deterioration and at the higher dose rates ($\sim 8 \times 10^9$ rads/sec.).

Although these conclusions, obtained from experimentally controlling the aftereffects for the first time, enhance our understanding appreciably, more work is needed to fully understand and control this phenomenon. In particular, we are uncertain why the GaAs Schottky diode is more prone to the aftereffects, as the Schottky junction itself behaves similar to a diffused junction under transient ionizing radiation.[6] (See also Section 2.6). The demonstrated effect of RF tuning in disc-and-post type cavities should be evaluated in other types of waveguide, coaxial and microstrip cavities. The aftereffects must be measured and evaluated in hi-lo and lo-hi-lo high efficiency GaAs diodes (as well as flat profile GaAs IMPATTs as used in this work) before they are incorporated in high performance radiation hardened applications.

4.0 SUMMARY AND CONCLUSIONS OF OVERALL PROGRAM

In this last chapter we summarize the main results obtained during the research program.

4.1 Neutron Radiation Results

Au-nGaAs and Al-nGaAs Schottky barrier diodes, fabricated from epitaxial and bulk material with carrier concentrations in the range of 7×10^{15} to 8×10^{16} cm^{-3}, were exposed to fast neutron fluences of 3.6×10^{14} and 2.2×10^{15} n/cm^2. At neutron fluences where the reduction in free carrier concentration is less than 20%, the following results were obtained:[20]

1. The forward characteristics are slightly changed at the low neutron fluences. Typically the n factor changed from 1.01 before irradiation to 1.05 after irradiation. The Al Schottky diodes exhibited a smaller increase in the n factor.
2. The current flow in the forward direction is due to thermionic emission with the metal-semiconductor barrier height remaining unchanged after irradiation.
3. The changes observed in the I-V characteristics at forward and small reverse bias (less than 2 volts) indicate that the density of interface states changes with irradiation. The density of interface states is reasonably approximated by a sharp peak of between 3×10^{13} to 10^{14} cm^{-2} eV^{-1} located at near the zero bias Fermi level before irradiation and after the low irradiation the density of interface states changes by a factor of 2 to 5 and becomes less peaked.

4. The reverse characteristics are greatly affected at the low neutron fluences. The increase in reverse current was more than an order of magnitude for the Au diodes at room temperature. The increase in reverse current in Al diodes was less than in the Au devices due to the higher initial reverse current because of the lower barrier height.
5. The excess reverse current is not due to generation-recombination with a constant lifetime. The reverse current after irradiation is strongly dependent upon voltage and relatively temperature independent. This characteristic indicates that thermionic emission is not the principal source of the observed increase in the reverse current and that it is due to a high field effect process. Considerations of the several possible field emissions processes showed that field emission from a trap has the appropriate field dependence exhibited by the data obtained and that the trap energy for field emission is of the order of 0.3 eV.
6. The increase in reverse current is higher in the highest doped diodes which indicates that the trap centers which cause the increase in reverse current by field emission are produced by a combination of the neutron damage and the doping in the material. In the highest doped diodes, the excess reverse current had almost the same value in the Au diodes as in the Al diodes indicating that it is independent of the metal used for forming the Schottky barrier.

4.2 Transient Ionizing Radiation Behavior

Transient ionizing radiation photocurrent measurements were taken with the gold and aluminum Schottky diodes before and after neutron irradiation in an evacuated chamber. The results support the following conclusions:

1. IMPATT diode oscillator aftereffects are definitely not a result of the Schottky junction per se as there were no anomalous aftereffects at the highest bias currents (200 mA) and dose rates (8×10^9 rads/sec) used.
2. The gold and aluminum diodes have similar photoresponse indicating that the response is not critically dependent on the details of the rectifying junction. Further, the photoresponse results are in substantial agreement with results in the literature for diffused diodes.
3. Neutron irradiation does not effect the photoresponse of the Schottky diodes at low neutron fluences where the depletion layer remains unchanged. This is further confirmation that the photoresponse is unrelated to the details of the interface and is controlled by photogeneration of carriers in and near the depletion region.

Thus, Schottky junction devices should perform adequately in transient ionizing radiation environments UNLESS THERE ARE SYNERGISTIC EFFECTS IN THE PARTICULAR APPLICATION.

4.3 IMPATT Diode Aftereffects

In this work we have been able to control the occurrence of these aftereffects by RF circuit tuning and have also been able to control the occurrence of bias circuit oscillations by bias circuit tuning. This is the first time that results have been reported with aftereffects having been experimentally controlled.[21] Although necessary and sufficient conditions for the aftereffects are still not known, the demonstrated relationships between IMPATT diode, RF cavity and bias circuit indicate that transient ionizing radiation can be detrimental to some IMPATT oscillators at dose rates above 2×10^9 rads/sec.

In particular, the following conclusions have been reached:

1. The principal cause of the aftereffects is a device-circuit interaction and is related to the RF circuit impedance locus at the fundamental frequency and/or the harmonic loading impedance at the diode.
2. The principal cause of the aftereffects is NOT the bias circuit impedance causing bias circuit oscillations, although it is believed that improper bias circuit impedance combined with aftereffects can cause diode failure with the ionizing radiation pulse.
3. The GaAs Schottky diode is more prone to the aftereffects with the occurrence at power levels above 200 mW and dose rates above 2×10^9 rads/sec in the diode tested. The aftereffects in the Si and GaAs diffused diodes only occurred with the diode operated slightly below power saturation and/or spectrum deterioration and at the higher dose rates (8×10^9 rads/sec).

4. The principal cause of the GaAs Schottky susceptibility to after-effects is NOT caused only by the Schottky junction, as photo-response evaluations indicate similar results under transient ionizing radiation as diffused junctions.

REFERENCES

1. A. Y. Yu and E. H. Snow, "Radiation Effects on Silicon Schottky Barriers", IEEE Trans. on Nuclear Science, NS-16, 220-226 (1969).

2. L. W. Aukerman, "Low Energy Proton Irradiation on Silicon Surface Barrier Detectors", IEEE Trans. on Nuclear Science, NS-19, 215-219 (1972).

3. R. J. Chaffin, Microwave Semiconductor Devices: Fundamentals and Radiation Effects, J. Wiley and Sons, New York, 1973.

4. R. H. Schnurr and H. D. Southward, "Radiation Effects upon Gallium Arsenide Devices", IEEE Transaction on Nuclear Science, NS-15, 306-310 (1968).

5. J. M. Borrego, R. J. Gutmann, P. E. Cottrell and S. K. Ghandhi, "Aftereffects in IMPATT Oscillators with Transient Ionizing Radiation", Proc. IEEE, 61, 675-676 (1973).

6. J. M. Borrego and R. J. Gutmann, "Interface States in Schottky Barrier Diodes", Scientific Report No. 1, September 1975, AFCRL Contract No. F 19628-74-C-0102.

7. J. M. Borrego and R. J. Gutmann, "Changes in Au-GaAs Schottky Barrier Diodes with Low Neutron Fluence", Appl. Phys. Lett., 28, 280-282 (1976).

8. J. D. Levine, "Schottky Barrier Anomalies and Interface States", Journal of Appl. Phys., 42, 3991-3999 (1971).

9. W. Shedd, B. Buchanan and R. Dolan, "Transient Radiation Effects in Silicon Diodes Near and In Avalanche Breakdown", IEEE Trans. on Nuclear Science, NS-18, 304-309 (1971).

10. O. Wada, S. Yanagisaun and H. Takanashi, "The Effect of Heat Treatment on Al-GaAs Schottky Barriers", Japan J. Appl. Phys., 12, 1814-1815 (1973).

11. J. M. Borrego, R. J. Gutmann, P. E. Cottrell and S. K. Ghandhi, "Transient Ionizing Radiation Effects in IMPATT Oscillators", IEEE Trans. on Nuclear Science, NS-19, 328-334 (1972).

12. W. A. Anderson, "A Radiation Pulse Interrupts IMPATT Diode Oscillation", Proc. IEEE, 58, 807 (1970).

13. C. A. Brackett, "The Elimination of Tuning-Induced Burnout and Bias Circuit Oscillations in IMPATT Oscillators", Bell System Technical Journal, 52, 271-306 (1973).

14. M. E. Hines, "Large Signal Noise, Frequency Conversion, and Parametric Instabilities in IMPATT Diode Networks", Proc. IEEE, 60, 1534-1548 (1972).

15. W. E. Schroeder, "Spurious Parametric Oscillations in IMPATT Diode Circuits", Bell System Technical Journal, 53, 1187-1210 (1974).

16. J. C. Slater, Microwave Electronics, Van Nostrand, 1950, Ch. 9.

17. K. Kurokawa, "Some Basic Characteristics of Broadband Negative Resistance Oscillator Circuits", Bell System Technical Journal, 48, 1937-1955 (1969).

18. K. Mouthaan, "Non-Linear Characteristics and Two-Frequency Operation of the Avalanche Transit Time Oscillator", Phillips Research Reports, 33-61 (1970).

19. C. A. Brackett, "Characterization of Second Harmonic Effects in IMPATT Diodes", Bell System Technical Journal, 49, 1777-1810 (1970).

20. J. M. Borrego, R. J. Gutmann and S. Ashok, "Neutron Radiation Effects in Gold and Aluminum GaAs Schottky Diodes", submitted for presentation at the 1976 IEEE Nuclear and Space Radiation Effects Conference.

21. R. J. Gutmann and J. M. Borrego, "Experimental Evaluation of After-effects in IMPATT Oscillators with Transient Ionizing Radiation", submitted for presentation at the 1976 IEEE Nuclear and Space Radiation Effects Conference.

APPENDIX

SR-52 Calculator Program to Determine Surface State Density

Definitions of Symbols

A	Area of diode (cm^2)
a	$1/\left\{1 - \exp(-11.605\ V_{j,j-1}/T)\right\}$
C_j	Small-signal capacitance of diode at voltage V_j (pF)
$C_{j,j-1}$	Small-signal capacitance of diode at voltage $V_{j,j-1}$ (pF)
$\mathcal{E}_j$	Peak junction electric field at voltage V_j (V/cm)
$\mathcal{E}_{j,j-1}$	Peak junction electric field at voltage $V_{j,j-1}$ (V/cm)
N'_{ss}	$1/\left\{a - \frac{1}{n} - \beta\left\lvert\frac{\Delta\sqrt{\mathcal{E}_j}}{\Delta V_j}\right\rvert\right.$ for FWD bias
	$1/\left\{\frac{1}{n} - \beta\left\lvert\frac{\Delta\sqrt{\mathcal{E}_j}}{\Delta V_j}\right\rvert\right\}$ for REV bias
n	Ideality factor
T	Temperature (^0K)
V_j	Applied voltage of diode (mV)
$V_{j,j-1}$	$(V_j + V_{j-1})/2$ (mV)
V_{j-1}, V_j	Successive diode voltages for decade(FWD bias) or 1/6 decade (REV bias) change in current (mV)
ΔV_j	$(V_j - V_{j-1})$ (mV)
β	Image-force barrier height reduction constant
	$\left(\frac{q}{4\pi\epsilon_d}\right)^{1/2} = 1.149 \times 10^{-4}$ (eV-cm)$^{1/2}$ for GaAs
ϵ_d	Optical dielectric constant for GaAs = 9.65×10^{-13} F/cm
$\Delta\phi_B$	Change in barrier hieght (meV)
$\mathcal{E}_o$	Zero-bias electric field (V/cm)
$\Delta\mathcal{E}_j$	$\sqrt{\mathcal{E}_j} - \sqrt{\mathcal{E}_{j-1}}$ $(V/cm)^{1/2}$
N_{ss}	Surface state density ($eV^{-1}\ cm^{-2}$)

TITLE Surface State Density from I-V and C-V PAGE ____ OF ____
PROGRAMMER ____ DATE ____

SR-52 Coding Form

LOC	CODE	KEY	COMMENTS
000 112		*LBL =	
		A INV	
		STO *if flg	
		0 0	
		5 cos	
005 117		HLT +/-	
		*LBL *LBL	
		B cos	
		STO +	
		0 RCL	
010 122		C 1	
		HLT 2	
		*LBL *√x	
		C =	
		STO *√x	
015 127		0 HLT	
		7 X	
		HLT RCL	
		*LBL 0	
		D 9	
020 132		STO X	
		0 RCL	
		8 0	
		HLT 4	
		*LBL =	
025 137		E HLT	
		STO (	
		0 RCL	
		9 0	
		HLT 8	
030 142		*LBL −	
		*A RCL	
		STO 1	
		1 3	
		0)	
035 147		HLT ÷	
		*LBL RCL	
		*B 1	

LOC	CODE	KEY	COMMENTS
		RCL 2	
		0 =	
040 152		1 SUM	
		X 1	
		RCL 4	
		0 RCL	
		7 0	
045 157		= 0	
		STO −	
		1 RCL	
		1 1	
		HLT 0	
050 162		*if flg *√x	
		0 X	
		+ RCL	
		(0	
		1 3	
055 167		− =	
		(*if flg	
		RCL 0	
		0 tan	
		2 +/-	
060 172		X *LBL	
		RCL tan	
		0 +	
		8 RCL	
		) 1	
065 177		INV 4	
		log =	
		) STO	
		*1/x 1	
		− 5	
070 182		RCL RCL	
		1 0	
		1 8	
		*√x STO	
		= 1	
075 187		*√x 3	

LOC	CODE	KEY	COMMENTS
		STO RCL	
		1 1	
		2 5	
		*LBL HLT	
080 192		+	
		INV	
		*if flg	
		0	
		sin	
085 197		RCL	
		1	
		1	
		STO	
		1	
090 202		2	
		*LBL	
		sin	
		(	
		RCL	
095 207		0	
		5	
		*√x	
		−	
		RCL	
100 212		0	
		6	
		*√x	
		)	
		X	
105 217		RCL	
		0	
		3	
		+	
		RCL	
110 222		0	
		7	

TEXAS INSTRUMENTS
INCORPORATED

LABELS
A ε_j
B ε_{j-1}
C ΔV_j
D $V_{j,j-1}$
E $C_{j,j-1}$
A' $\varepsilon_{j,j-1}$
B' START
C'
D'
E'
REGISTERS
00 $\beta\sqrt{\varepsilon_0}$
01 $\frac{5.0400\text{E}}{T(°K)}$ or x6
02 $\frac{-11.605}{T(°K)}$
03 11.49
04 $10^{-12}/qA$
05 ε_j
06 ε_{j-1}
07 ΔV_j
08 $V_{j,j-1}$
09 $C_{j,j-1}$
10 $\varepsilon_{j,j-1}$
11 n
12 n'
13 $V_{j,j-1}$ previous value
14 $\Delta\phi_n'$
15 $\Delta\phi_n$
16
17
18
19
FLAGS
0 0 forward loop, 1 reverse loop
1
2
3
4

TITLE Surface State Density from I-V and C-V PAGE ____ OF ____

	◀A▶			
$\varepsilon_{j,j-1}$				
ε_j	ε_{j-1}	ΔV_j	$V_{j,j-1}$	$C_{j,j-1}$

	◀B▶			

STEP	PROCEDURE	ENTER	PRESS			DISPLAY
1	ENTER PROGRAM (A & B)	$\beta\sqrt{E_o}$ in 10^4V/cm	STO	0	0	
2	ENTER CONSTANTS	5.04006/T(°K) for FWD 30.24/T(°K) for REV	STO	0	1	
		$-11.605/T(°K)$	STO	0	2	
		$\beta = 11.49$	STO	0	3	
		$10^{-12}/q_A$	STO	0	4	
3	FLAG FOR FWD/REV BIAS		INV *st flg	*st flg 0	0	← FWD ← REV
4	INITIALIZE $V^{\bullet}_{j,j-1}$ & $\Delta\phi'_s$	0	STO	1	3	
		0	STO	1	4	
5	ENTER VARIABLES	ε_j in 10^4V/cm	A			
		ε_{j-1} in 10^4V/cm	B			
		ΔV_j in mV	C			
		$V_{j,j-1}$ in mV	D			
		$C_{j,j-1}$ in mV	E			
		$\varepsilon_{j,j-1}$ in 10^4V/cm	*A'			
6	START & COMPUTE η		*B'			η
	COMPUTE N'_{ss}		RUN			N'_{ss}
	COMPUTE N_{ss}		RUN			N_{ss} in $eV^{-1}cm^{-2}$
	COMPUTE $\Delta\phi_s$		RUN			$\Delta\phi_s$ in meV

© 1975 Texas Instruments Incorporated

PRECEDING PAGE BLANK-NOT FILMED

TRW SYSTEMS GROUP
ATTN AARON H NAREVSKY R1-2144

ONE SPACE PARK
REDONDO BEACH, CA 90278

LABEL 000000000AJ03LB 0007623701762

LABEL 000000000AJ03LB 0007623701762

DIRECTOR
DEFENSE ADVANCED RSCH PROD AGENCY
ATTN STU LTC ROBERT P SULLIVAN
ARCHITECT BUILDING
ARLINGTON, VA. 22209

DEFENSE COMMUNICATION ENGINEER CENTER
ATTN CODE R320 C W BERGMAN
1860 WIEHLE AVENUE
RESTON, VA 22090

WESTINGHGOUSE ELECTRIC CORPORATION
ATTN HENRY P KALAPACA M S 3525
DEFENSE AND ELECTRONIC SYSTEMS CTR
P.O. BOX 1693
FRIENDSHIP INTERNATIONAL AIRPORT
BALTIMORE, MD 21203

WESTINGHOUSE ELECTRIC CORPORATION
ATTN WILLIAM E NEWELL
RESEARCH AND DEVELOPMENT CENTER
1310 BEULAH ROAD, CHURCHILL BOROUGH
PITTSBURGH, PA 15235

IRT CORPORATION
ATTN R L HERTZ
P.O. BOX 81087
SAN DIEGO, CA 92138

IRT CORPORATION
ATTN LEO D COTTER
P.O. BOX 81087
SAN DIEGO, CA 92138

IRT CORPORATION
ATTN RALPH H STAHL

P.O. BOX 81087
SAN DIEGO, CA 92138

IRT CORPORATION
ATTN JAMES A NABER
P.O. BOX 81087
SAN DIEGO, CA 92138

JOHNS HOPKINS UNIVERSITY
ATTN PETER E PARTRIDGE
APPLIED PHYSICS LABORATORY
JOHNS HOPKINS ROAD
LAUREL MD 20810

KAMAN SCIENCE CORPORATION
ATTN DONALD H BRYCE
P.O. BOX 7463
COLORAGO SPRINGS, CO 80933

UNITED TECHOLOGIES CORPORATION
ATTN RAYMOND G GIGUERE
HAMILTON STANDARD DIVISION
BRADLEY INTERNATIONAL AIRPORT
WINDOSR LUCAS, CT 06069

CHARLES STARK DRAPER LABORATORY INC
ATTN RICHARD G HALTMAIER
68 ALBANY STREET
CAMBRIDGE, MA 02139

CHARLES STARK DRAPER LABORATORY INC
ATTN KENNETH FERTIG
68 ALBANY STREET
CAMBRIDGE, MA 02139

CHARLES STARK DRAPER LABORATORY INC
ATTN PAUL R KELLY
68 ALBANY STREET
CAMBRIDGE, MA 02139

CINCINNATI ELECTRONCIS CORPORATION
ATTN C R STUMP
2630 GLENDALE - MILFORD ROAD
CINCINNATI, OH 45241

CINCINNATI ELECTRONICS CORPORATION
ATTN LOIS HAMMOND
2630 GLENDALE - MILFORD ROAD
CINCINNATI, OH 45241

COMPUTER SCIENCES CORPORATION
ATTN RICHARD H DICKHAUT
201 LA VETA DRIVE N.E.
ALBUQUERQUE, NM 87108

CUTLER-HAMMER, INC.
ATTN CENTRAL TECH FILES ANNE ANTHONY
AIL DIVISION
COMAC ROAD
DEER PARK, NY 11729

DIKEOOD CORPORATION, THE
ATTN L WAYNE DAVIS
1009 BRADBURY DRIVE, S.E.
UNIVERSITY RESEARCH PARK
ALBUQUERQUE, NM 87106

E-SYSTEMS INC.
ATTN LIBRARY 8-50100
GREENVILLE DIVISION
P.O. BOX 1056
GREENVILLE, TX 75401

EFFECTS TECHNOLOGY, INC.
ATTN EDWARD JOHN STEELE
5383 HOLLISTER AVENUE
SANTA BARBARA, CA 93105

ELECTRONICS TECHNOLOGY LABORATORY
ATTN R CURRY (UNCL ONLY)
ENGINEERING EXPERIMENT STATION
GEORGIA INSITUTE OF TECHNOLOGY
ATLANTA, GA 30332

EXP AND MATH PHYSICS CONSULTANTS
ATTN THOMAS M JORDAN
P.O. BOX 66331
LOS ANGELES, CA 90066

FAIRCHILD CAMERA AND INSTRUMENT CORP
ATTN SEC DEPT FOR 2-233 DAVID K MYERS
464 ELLIS STREET
MOUNTAIN VIEW, CA 94040

FAIRCHILD INDUSTRIES, INC.
ATTN MGR COUFIG DATA AND STANDARDS
SHERMAN FAIRCHILD TECHNOLOGY CENTER
20301 CENTURY BOULEVARD
GERMANTOWN, MO 20767

SANDIA LABORATORIES
ATTN DOC CON FOR ORG 2110 A HOOD
P.O. BOX 5800
ALBUQUERQUE, NM 87115

SANDIA LABORATORIES
ATTN DOC CON FOR ORG 1933 FM COPPAGE
P.O. BOX 5800
ALBUQUERQUE, NM 87115

SANDIA LABORATORIES
ATTN DOC CON FOR JACK V WALKER 5220
P.O. BOX 5800
ALBUQUERQUE, NM 87115

SANDIA LABORATORIES
ATTN DIV 5231 JAMES H RENKEN
P.O. BOX 5800
ALBUQUERQUE, NM 87115

SANDIA LABORATORIES
ATTN DOC CON FOR 3141 SANDIA RPT COL
P.O. BOX 5800
ALBUQUERQUE, NM 87115

U S ENERGY RSCH AND DEV ADMIN
ATTN DOCUMENT CONTROL FOR WSSR
ALBUQUERQUE OPERATIONS OFFICE
P.O. BOX 5400
ALBUQUERQUE, NM 67115

CENTRAL INTELLIGENCE AGENCY
ATTN ALICE A PADGETT
ATTN: RD/S1 RM 5G48 HQ BLDG
WASHINGTON, DC 20505

UNIVERSITY OF CALIFORNIA
LAWRENCE LIVERMORE LABORATORY
ATTN DONALD J MEEKER L-545 (CLASS L -153)
P.O. BOX 808
LIVERMORE CA 94550

UNIVERSITY OF CALIFORNIA
LAWRENCE LIVERMORE LABORATORY
ATTN HANS KRUGER L-96 (CLASS L-94)
P.O. BOX 808
LIVERMORE CA 94550

UNIVERSITY OF CALIFORNIA
LAWRENCE LIVERMORE LABORATORY
ATTN FREDERICK R KOVAR L-31 (CLASS L -91)
P.O. BOX 808
LIVERMORE CA 94550

LOS ALAMOS SCIENTIFIC LABORATORY
ATTN DOC CON FOR MARVIN M HOFFMAN
P.O. BOX 1663
LOS ALAMOS, NM 87545

LOS ALAMOS SCIENTIFIC LABORATORY
ATTN DOC CON FOR J ARTHUR FREED
P.O. BOX 1663
LOS ALAMOS, NM 87545

LOS ALAMOS SCIENTIFIC LABORATORY
ATTN DOC CON FOR BRUCE W NOEL
P.O. BOX 1663
LOS ALAMOS, NM 87545

SANDIA LABORATORIES
ATTN DOC CON FOT THEOBORE A DELLIN
LIVERMORE LABORATORY
P.O. BOX 969
LIVERMORE, CA 94550

SAMSO/DY
ATTN DYS MAJ LARRY A DARDA
POST OFFICE BOX 92960
WORLDWAY POSTAL CENTER
LOS ANGELES, CA 90009
(TECHNOLOGY)

SAMSO/DY
ATTN DYS CAPT WAYNE SCHOBER
POST OFFICE BOX 92960
WORLDWAY POSTAL CENTER
LOS ANGELES, CA 90009
(TECHNOLOGY)

SAMSO/IN
ATTN IND I J JUDY
POST OFFICE BOX 92960
WORLDWAY POSTAL CENTER
LOS ANGELES, CA 90009
(INTELLIGENCE)

SAMSO/MN
ATTN MINC CAOT DAVID J STROBEL
NORTON AFB, CA 92409
(MINUTEMAN)

SAMSO/RS
ATTN RSSE LTC KENNETH L GILBERT
POST OFFICE BOX 92960
WORLDWAY POSTAL CENTER
LOS ANGELES, CA 90009
(REENTRY SYSTEMS)

SAMSO/RS
ATTN RSE
POST OFFICE BOX 92960
WORLDWAY POSTAL CENTER
LOS ANGELES, CA 90009
(REENTRY SYSTEMS)

SAMSO/SZ
ATTN SZJ CAPT JOHN H SALCH
POST OFFICE BOX 92960
WORLDWAY POSTAL CENTER
LOS ANGELES, CA 90009
(SPACE DEFENSE SYSTEMS)

SAMSO/YD
ATTN YDD MAJ MARION F SCHNEIDER
POST OFFICE BOX 92960
WORLDWAY POSTAL CENTER
LOS ANGELES, CA 90009
(DEF METEOPOLOGICAL SAT SYS)

COMMANDER IN CHEIF
STRATEGIC AIR COMMAND
ATTN NPI-STINFO LIBRARY
OFFUTT AFB, NB 68113

COMMANDER IN CHIEF
STRATEGIC AIR COMMAND
ATTN PFS MAJ BRIAN G STEPHAN
OFFUTT AFB, NB 68113

UNIVERSITY OF CALIFORNIA
LAWRENCE LIVERMORE LABORATORY
ATTN JOSEPH F KELLER JR L-125
P.O. BOX 808
LIVERMORE CA 94550

UNIVERSITY OF CALIFORNIA
LAWRENCE LIVERMORE LABORATORY
ATTN LAWRENCE CLFLAND L-156
P.O. BOX 808
LIVERMORE CA 94550

UNIVERSITY OF CALIFORNIA
LAWRENCE LIVERMORE LABORATORY
ATTN RONALD L OTT L-531
P.O. BOX 808

UNIVERSITY OF CALIFORNIA
LAWRENCE LIVERMORE LABORATORY
ATTN TECH INFO DEPT L-3
P.O. BOX 808
LIVERMORE CA 94550

DIRECTOR
STRATEGIC SYSTEMS PROJECT OFFICE
ATTN NSP-27331 PHIL SPECTOR
NAVY DEPARTMENT
WASHINGTON, DC 20376

DIRECTOR
STRATEGIC SYSTEMS PROJECT OFFICE
ATTN NSP-2342 RICHARLD L COLEMAN
NAVY DEPARTMENT
WASHINGTON, DC 20376

AF GEOPHYSICS LABORATORY, AFSC
ATTN LGO-STOP 30 FREEMAN SHEPERD
HANSOM AFB, MA 01731

AF GEOPHYSICS LABORATORY, AFSC
ATTN EMERY CORMIER
HANSCOM AFB, MA 01731

AF GEOPHYICS LABORATORY, AFSC
ATTN LQR EDWARD A BURKE
HANSCOM AFB, MA 01731

AF INSTITUTE OF TECHNOLOGY, AU
ATTN ENP CHARLES J BRIDGMAN
WRIGHT-PATTERSON AFB, OH 45433

AF MATERIALS LABORATORY, AFSC
ATTN LTE
WRIGHT-PATTERSON AFB, OH 45433

AF WEAPONS LABORATORY, AFSC
ATTN ELA
KIRTLAND AFB, NM 87117

AF WEAPONS LABORATORY AFSC
ATTN SAT
KIRTLAND AFB, NM 87117

AF WEAPONS LABORATORY, AFSC
ATTN SAB
KIRTLAND AFB, NM 87117

AFTAC
ATTN TAE
PATRICK AFB, FL 32925

HEADQUARTERS
ELECTRONIC SYSTEMS DIVISION, (AFSC)
ATTN YSEV LTC DAVIS C SPARKS
L. G. HANSCOM FIELD
REDFORD, MA 01730

COMMANDER
FOREIGN TECHNOLOGY DIVISION, AFSC
ATTN ETET APT RICHARD C HUSEMANN
WRIGHT-PATTERSON AFB, OH 45433

COMMANDER
ROME AIR DEVELOPMENT CENTER, AFSC
ATTN RBRAC I L KRULAC
GRIFFISS AFB, NY 13440

AERONUTRONIC FORD CORPORATION
ATTN EDWARD R HAHN MS-x22
WESTERN DEVELOPMENT LABORATORIES DIV.
3939 FABIAN WAY
PALO ALTO, CA 94303

AERONUTRONIC FORD CORPORATION
ATTN DONALD R MCMORRO, MS G3)
WESTERN DEVELOPMENT LABORATORIES DIV
3939 FABIAN WAY
PALO ALTO, CA 94303

AEROSPACE CORPORATION
ATTN WILLIAM W WILLIS
P.O. BOX 92957
LOS ANGELES, CA 90009

AEROSPACE CORPORATION
ATTN MELVIN BERNSTEIN
P.O. BOX 92957
LOS ANGELES, CA 90009

AEROSPACE CORPORATION
ATTN IRVING M GARFUNEKL
P.O. BOX 92957
LOS ANGELES, CA 90009

AEROSPACE CORPORATION
ATTN JULIAN REINHEIMER
P.O. BOX 92957
LOS ANGELES, CA 90009

AEROSPACE CORPORATION
ATTN L W AUKERMAN
P.O. BOX 92957
LOS ANGELES, CA 90009

COMMANDER
NAVAL SURFACE WEAPONS CENTER
ATTN WILLIAM H HOLT
DAHLGREN LABORATORY
DAHLGREN, VA 22448

COMMANDER
NAVAL WEAPONS CENTER
ATTN CODE 533 TECH LIB
CHINA LAKE, CA 93555

COMMANDING OFFICER
NAVAL WEAPONS EVALUATION FACILITY
ATTN CODE ATG MR STANLEY
KIRTLAND AIR FORCE BASE
ALBUQUERQUE, NM 87117

COMMANDING OFFICER
NAVAL WEAPONS SUPPORT CENTER
ATTN CODE 70242 JOSEPH A MUNARIN
CRANE, IN 47522

COMMANDING OFFICER
NAVAL WEAPONS SUPPORT CENTER
ATTN CODE 7024 JAMES RAMSEY
CRANE, IN 47522

COMMANDING OFFICER
NUCLEAR WEAPONS TNG CENTER PACIFIC
ATTN CODE 50
NAVAL AIR STATION, NORTH ISLAND
SAN DIEGO, CA 92135

DIRECTOR
STRATEGIC SYSTEMS PROJECT OFFICE
ATTN SP 2701 JOHN W PITSENBERGER
NAVY DEPARTMENT
WASHINGTON, DC 20376

DEPARTMENT OF COMMERCE
ATTN APPL RAD DIV ROBERT C PLACIOUS
NATIONAL BUREAU OF STANDARDS
WASHINGTON, DC 20234

DEPARTMENT OF COMMERCE
ATTN JUDSON C FRENCH
NATIONAL BUREAU OF STANDARDS
WASHINGTON, DC 20234

AEROJET ELECTRO-SYSTEMS CO DIV
ATTN THOMAS D HANSCOME
AEROJET GENERAL CORPORATION
P.O. BOX 296
AZUSA, CA 91702

AERONUTRONIC FORD CORPORATION
ATTN E R PONCELET JR
AEROSPACE AND COMMUNICATIONS OPS
AERONUTRONIC DIVISION
FORD AND JAMBOREE ROADS
NEWPORT BEACH, CA 92663

AERONUTRONIC FORD CORPORATION
ATTN KEN C ATTINGER
AEROSPACE AND COMMUNUCATIONS OPS
AERONUTRONIC DIVISION
FORD AND JAMBOREE ROADS
NEWPORT BEACH, CA 92663

AERONUTRONIC FORD CORPORATION
ATTN TECH INFO SECTION
AEROSPACE AND COMMUNICATIONS OPS
AERONUTRONIC DIVISION
FORD AND JAMBOREE ROADS
NEWPORT BEACH, CA 92663

AERONUTRONIC FORD CORPORATION
ATTN SAMUEL R CRAWFORD MS 531
WESTERN DEVELOPMENT LABORATORIES DIV
3939 FABIAN WAY
PALO ALTO, CA 94303

CHIEF OF NAVAL RESEARCH
ATTN CODE 421 DORAN W PADGETT
NAVY DEPARTMENT
ARLINGTON, VA 22217

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
ATTN ELEX 05323 CLEVELAND F WATKINS
NAVAL ELECTRONIC SYSTEMS CMD HQS
WASHINGTON, DC 20360

COMMANDER
ATTN CODE 5032 CHARLES W NEILL
NAVAL ELECTRONIC SYSTEMS CMD HQS
WASHINGTON, DC 20360

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
ATTN CODE 504510
NAVAL ELECTRONIC SYSTEMS CMD HQS
WASHINGTON, DC 20360

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
ATTN PME 117-21
NAVAL ELECTRONIC SYSTEMS CMD HQS
WASHINGTON, DC 20360

COMMANDING OFFICER
NAVAL INTELLIGENCE SUPPORT CTR
ATTN P ALEXANDER
4301 SUITLAND ROAD BLDG. 5
WASHINGTON, DC 20390

COMMANDING OFFICER
NAVAL INTELLIGENCE SUPPORT CTR
ATTN NISC-45
4301 SUITLAND ROAD BLDG. 5
WASHINGTON, DC 20390

COMMANDER
US ARMY MOBILITY EQUIP R AND D CTR
ATTN STSFB-MW JOHN W BOND JR
FORT BELVOIR, VA 22060

CHIEF
U S ARMY NUC AND CHEMICAL SURETY GP
ATTN MOSG-ND MAJ SIDNEY W WINSLOW
BLDG. 2073 , NORTH AREA
FT. BELVOIR, VA 22060

COMMANDER
US ARMY NUCLEAR AGENCY
ATTN ATCN- LTC LEONARD A SLUGA
FORT BLISS, TX 79916

COMMANDER
U S ARMY TEST AND EVALUATION COMD
ATTN DRSTE-EL RICHARD I KOLCHIN
ABERDEEN PROVING GROUND, MD 21005

COMMANDER
U S ARMY TESTA AND EVALUATION COMD
ATTN DRSTE-NB RUSSELL R GALASSO
ABERDEEN PROVING GROUND, MD 21005

COMMANDER
WHITE SANDS MISSILE RANGE
ATTN STENS-TE-NT MARVIN P SQUIRES
WHITE SANDS MISSILE RANGE, NM 88002

CHIEF OF NAVAL RESEARCH
ATTN CODE 427
NAVY DEPARTMENT
ARLINGTON, VA 22217

COMMANDER
ATTN DPCDE-O LAWRENCE FLYNN
5001 EISENHOWER AVENUE
ALEXANDRIA, VA 22333

COMMANDER
U S ARMY MISSILE COMMAND
ATTN DRSMI-RGO VIC RUNE(UNCL ONLY)
REDSTONE ARSENAL, AL 35809

COMMANDER
U S ARMY MISSILE COMMAND
ATTN DRCPM-MDTI CPT JOE A SIMS
REDSTONE ARSENAL, AL 35809

COMMANDER
U S ARMY MISSILE COMMAND
ATTN DRCPM-LCEX HOWARD H HENRIKSEN
REDSTONE ARSENAL, AL 35809

COMMANDER
U S ARMY MISSILE COMMAND
ATTN DRSMI-RGP HUGH GREEN
REDSTONE ARSENAL, AL 35809

COMMANDER
U S ARMY MISSILE COMMAND
ATTN DRSMI-RRR FAISON P GIBSON
REDSTONE ARSENAL, AL 35809

COMMANDER
U S ARMY MISSILE COMMAND
ATTN DRCPM PE-EA WALLACE D WAGNER
REDSTONE ARSENAL, AL 35809

COMMANDER
U S ARMY ELECTRONICS COMMAND
ATTN DRSEL-CT-HD. ABRAHAM F COHEN
FORT MONMOUTH, NJ 07703

COMMANDER
U S ARMY ELECTRONICS COMMAND
ATTN DRSEL-GG-TED W R WERK (NO CNDWI)
FORT MONMOUTH, NJ 07703

COMMANDER
U S ARMY ELECTRONICS COMMAND
ATTN DRSEL-TL-EN ROBERT LUX
FORT MONMOUTH, NJ 07703

COMMANDER
U S ARMY ELECTRONICS COMMAND
ATTN DRSEL-TL-ND GERHART GAULE
FORT MONMOUTH, NJ 07703

COMMANDER
U S ARMY ELECTRONICS COMMAND
ATTN DRSEL-TL-ND S KRONENBEY
FORT MONMOUTH, NJ 07703

COMMANDER
U S ARMY ELECTRONICS COMMAND
ATTN DRSEL-PL-ENV HANS A BOMKE
FORT MONMOUTH, NJ 07703

COMMANDER-IN-CHIEF
U S ARMY EUROPE AND SEVENTH ARMY
ATTN ODCSE-E AEAGE-PI
APO NEW YORK 09403

DIRECTOR
U S ARMY BALLISTIC RESEARCH LABS
ATTN DRXBR-X JUL US J HESZAROS
ABERDEEN PROVING GROUND, MD 21005

DIRECTOR
US ARMY BALLISTIC RESEARCH LABS
ATTN DRXBR-VL ROBERT L HARRISON
ABERDEEN PROVING GROUND, MD 21005

DIRECTOR
U S ARMY BALLISTIC RESEARCH LABS
ATTN DRXBR-AM W R VANANTWERP
ABERDEEN PROVING GROUND, MD 21005

DIRECTOR
U S ARMY BALLISTIC RESEARCH LABS
ATTN DRARD-RVL DAVID L RIGOTTI
ABERDEEN PROVING GROUND, MD 21005

CHIEF
U S ARMY COMMUNICATIONS SYS AGENCY
ATTN SCCM-AU-SV LIBRARY
FORT MONMOUTH, NJ 07703

COMMANDER
U S ARMY ELECTRONICS COMMAND
ATTN DRSEL-TL-EN E ROTH
FORT MONMOUTH, NJ 07703

COMMANDER
U S ARMY ELECTRONICS COMMAND
ATTN DRSEL-TL-IR EDWIN T HUNTER
FORT MONMOUTH, NJ 07703

COMMANDER
PICATINNY ARSENAL
ATTN SMUPA-TN BURTON V FRANKS
DOVER, NJ 07801

COMMANDER
PICATINNY ARSENAL
ATTN SARPA-ND-C-E AMINA NORDIO
DOVER, NJ 07801

COMMANDER
PICATINNY ARSENAL
ATTN SARPA-ND-N
DOVER, NJ 07801

COMMANDER
REDSTONE SCIENTIFIC INFORMATION CTR
ATTN CHIEF, DOCUMENTS
U.S. ARMY MISSILE COMMAND
REDSTONE ARSENAL, AL 35809

SECRETARY OF THE ARMY
ATTN DOUSA OR DANIEL WILLARD
WASHINGTON, DC 20310

COMMANDER
TRANSANA
ATTN ATAA-EAC FRANCIS N INANS
WHITE SANDS MISSILE RANGE, NM 88002

DIRECTOR
U S ARMY BALLISTIC RESEARCH LABS
ATTN DRXBR-VL JOHN W KINCH
ABERDEEN PROVING GROUND, MD 21005

COMMANDER
HARRY DIAMOND LABORATORIES
ATTN DRXDO-TT TECH LTR
2800 POWDER MILL ROAD
ADELPHI, MD 20783

COMMANDING OFFICER
NIGHT DIVISION LABORATORY
ATTN CAPT ALLAN S PARKER
U S ARMY ELECTRONICS COMMAND
FORT BELVOIR, VA 22060

COMMANDER
PICATINNY ARSENAL
ATTN SMUPA-FR-S-P
DOVER, NJ 07801

COMMANDER
PICATINNY ARSENAL
ATTN SARPA-FO-E LOUIS AVRAMI
DOVER, NJ 07801

COMMANDER
PICATINNY ARSENAL
ATTN SMUPA-ND-W
DOVER, NJ 07801

COMMANDER
PICATINNY ARSENAL
ATTN SMUPA-ND-N-E
DOVER, NJ 07801

COMMANDER
PICATINNY ARSENAL
ATTN SMUPA-ND-D-R EDWARD J ARBER
DOVER, NJ 07801

COMMANDER
HARRY DIAMOND LABORATORIES
ATTN DRXDU-RCC JOHN A ROSADO
2800 POWDER MILL ROAD
ADELPHI, MD 20783

COMMANDER
HARRY DIAMOND LABORATORIES
ATTN DRXDO-NP FRANCIS N WIMENITZ
2800 POWDER MILL ROAD
ADELPHI, MD 20783

COMMANDER
HARRY DIAMOND LABORATORIES
ATTN DRXDO-RB JOSEPH R HULETTA
2800 POWDER MILL ROAD
ADELPHI, MD 20783

COMMANDER
HARRY DIAMOND LABORATORIES
ATTN DRXDU-RCC JOHN E THOMPKINS
2800POWDER MILL ROAD
ADELPHI MD 20783

COMMANDER
HARRY DIAMOND LABORATORIES
ATTN DRXDO-EM R BOSTAK
2800 POWDER MILL ROAD
ADELPHI MD 20783

COMMANDER
HARRY DIAMOND LABORATORIES
ATTN DRXDO-RBH PAUL A CALDWELL
2800 POWDER MILL ROAD
ADELPHI MD 20783

COMMANDER
HARRY DIAMOND LABORATORIES
ATTN DRXDO-RB ROBERT E MCCOSKEY
2800 POWDER MILL ROAD
ADELPHI MD 20783

DIRECTOR
NATIONAL SECURITY AGENCY
ATTN TDL
FT. GEORGE G. MEADE, MD 20755

PROJECT MANAGER
ARMY TACTICAL DATA SYSTEMS
ATTN DRCPN-TDS-SD
U S ARMY ELECTRONICS COMMAND
FORT MONMOUTH, NJ 07703

PROJECT MANAGER
ARMY TACTICAL DATA SYSTEMS
ATTN DWAINE H HUEE
U S ARMY ELECTRONICS COMMAND
FORT MONMOUTH, NJ 07703

COMMANDER
RMD SYSTEM COMMAND
ATTN BDMSC-TEN NOAH J HURST
P.O BOX 1500
HUNTSVILLE, AL 35807

COMMANDER
FRANKFORD ARSENAL
ATTM SARFA-FCD MARVIN ELNICK
BRIDGE AND TACONY STREETS
PHILADELPHIA, PA 19137

COMMANDER
HARRY DIAMOND LABORATORIES
ATTN DRXDO-RC ROBERT B OSWALD JR
2800 POWDER MILL ROAD
ADELPHI MD 20783

COMMANDER
HARRY DIAMOND LABORATORIES
ATTN CRXDO-TR EDWARD E CONRAD
2800 POWDER MILL ROAD
ADELPHI MD 20783

DIRECTOR
DEFENSE COMMUNICATIONS AGENCY
ATTN CODE 930 MONTE I RUBGETT JR
WASHINGTON, DC 20305

DEFENSE DOCUMENTATION CENTER
ATTN TC
CAMERON STATION
ALEXANDRIA, VA 22314

DIRECTOR
DEFENSE INTELLIGENCE AGENCY
ATTN DS-4A2
WASHINGTON, DC 20301

DIRECTOR
DEFENSE NUCLEAR AGENCY
ATTN RATN
WASHINGTON, DC 20305

DIRECTOR
DEFENSE NUCLEAR AGENCY
ATTN STTL TECH LIBRARY
WASHINGTON, DC 20305

DIRECTOR
DEFENSE NUCLEAR AGENCY
ATTN DDST
WASHINGTON, DC 20305

DIRECTOR
DEFENSE NUCLEAR AGENCY
ATTN RAEV
WASHINTON, DC 20305

DIRECTOR
DEFENSE NUCLEAR AGENCY
ATTN STVL
WASHINGTON, DC 20305

COMMANDER
FIELD COMMAND
ATTN FCPR
DEFENSE NUCLEAR AGENCY
KIRTLAND AFB, NM 87115

DIRECTOR
INTERSERVICE NUCLEAR WEAPONS SCHOOL
ATTN DOCUMENT CONTROL
KIRTLAND AFB, NM 87115

DIRECTOR
JOINT STRAT TGT PLANNING STAFF JCS
ATTN ULTW-2
OFFUTT AFB
OMAHA, NB 68113

CHIEF
LIVERMORE DIVISION FLD COMMAND DNA
ATTN DOCUMENT CONTROL FOR L-395
LAWRENCE LIVERMORE LABORATORY
P.O. BOX 808
LIVERMORE, CA 94550

CHIEF
LIVERMORE DIVISION FLD COMMAND DNA
ATTN FCPRL
LAWRENCE LIVERMORE LABORATORY
P.O. BOX 808
LIVERMORE, CA 94550

DIRECTOR
NATIONAL SECURITY AGENCY
ATTN ORLAND O VAN GUNTEN R-425
FT. GEORGE G. MEADE, MD 20755

TRW SYSTEMS GROUP
ATTN PAUL MOLMUD R1-1196
ONE SPACE PARK
REDONDO BEACH, CA 90278

TRW SYSTEMS GROUP
ATTN LILLIAN D SINGLETAR R1-1070
ONE SPACE PARK
REDONDO BEACH, CA 90278

TRW SYSTEMS GROUP
ATTN R D LOVELAND R1-1028
ONE SPACE PARK
REDONDO BEACH, CA 90278

TRW SYSTEMS GROUP
ATTN RICHARD H KINGSLAND R1-2154
ONE SPACE PARK
REDONDO BEACH, CA 90278

TRW SYSTEMS GROUP
ATTN H S JENSEN
SAN BERNARDINO OPERATIONS
P.O. BOX 1310
SAN BERNARDINO, CA 92402

TRW SYSTEMS GROUP
ATTN JOHN E DAHNKE
SAN BERNARDINO OPERATIONS
P.O. BOX 1310
SAN BERNARDINO, CA 92402

TRW SYSTEMS GROUP
ATTN EARL W ALLEN
SAN BERNARDINO OPERATIONS
P.O. BOX 1310
SAN BERNARDINO,CA 92402

TEXAS TECH UNIVERSITY
ATTN TRAVIS L SIMPSON
P.O. BOX 5404 NORTH COLLEGE STATION
LUBBOCK, TX 79417

TRW SYSTEMS GROUP
ATTN ALLAN ANDERMAN R1-1132
ONE SPACE PARK
REDONDO BEACH, CA 90278

TRW SYSTEMS GROUP
ATTN A A WITTELES MS R1-1120
ONE SPACE PARK
REDONDO BEACH, CA 90278

TRW SYSTEMS GROUP
ATTN A M LIEBSCHUTZ R1-1162
ONE SPACE PARK
REDONDO BEACH, CA 90278

TRW SYSTEMS GROUP
ATTN TECH INFO CENTER R/S-1930
ONE SPACE PARK
REDONDO BEACH, CA 90278

TRW SYSTEMS GROUP
ATTN WILLIAM H ROBINETTE JR
ONE SPACE PARK
REDONDO BEACH, CA 90278

TRW SYSTEMS GROUP
ATTN JERRY T LUBELL
ONE SPACE PARK
REDONDO BEACH, CA 90278

DIRECTOR
NAVAL RESEARCH LABORATORY
ATTN CODE 6631 JAMES C RITTER
WASHINGTON, DC 20375

DIRECTOR
NAVAL RESEARCH LABORATORY
ATTN CODE 4004 EMANUAL L BRANCATO
WASHINGTON, DC 20375

DIRECTOR
NAVAL RESEARCH LABORATORY
ATTN CODE 7701 JACK D BROWN
WASHINGTON, DC 20375

DIRECTOR
NAVAL RESEARCH LABORATORY
ATTN CODE 5216 HAROLD L HUGHES
WASHINGTON, DC 20375

DIRECTOR
NAVAL RESEARCH LABORATORY
ATTN CODE 6601 E WOLICKI
WASHINGTON, DC 20375

DIRECTOR
NAVAL RESEARCH LABORATORY
ATTN CODE 5210 JOHN E DAVEY
WASHINGTON, DC 20375

DIRECTOR
NAVAL RESEARCH LABORATORY
ATTN CODE 2627 DORIS R FOLEN
WASHINGTON, DC 20375

COMMANDER
NAVAL SEA SYSTEMS COMMAND
ATTN SEA-9931 SAMUEL A BARHAM
NAVY DEPARTMENT
WASHINGTON DC 20362

COMMANDER
NAVAL SEA SYSTEMS COMMAND
ATTN SEA-9931 RILEY B LANE
NAVY DEPARTMENT
WASHINGTON DC 20362

COMMANDER
NAVAL SHIP ENGINEERING CENTER
ATTN CODE 6174D2 EDWARD F DUFFY
CENTER BUILDING
HYATTSVILLE, MD 20782

COMMANDER
NAVAL SURFACE WEAPONS CENTER
ATTN CODE WA501 NAVY NUC PRGMS OFF
WHITE OAK, SILVER SPRING, MD 20910

COMMANDER
NAVAL SURFACE WEAPONS CENTER
ATTN CODE 431 EDWIN B DEAN
WHITE OAK, SILVER SPRING, MD 20910

COMMANDER
NAVAL SURFACE WEAPONS CENTER
ATTN CODE WA50 JOHN H MALLOY
WHITE OAK, SILVER SPRING, MD 20910

COMMANDER
NAVAL SURFACE WEAPONS CENTER
ATTN CODE WX21 TECH LIB
WHITE OAK, SILVER SPRING, MD 20910

BOEING COMPANY, THE
ATTN AEROSPACE LIBRARY
P.O. BOX 3707
SEATTLE, WA 98124

BOEING COMPANY, THE
ATTN DAVID L DYE M S 87-75
P.O. BOX 3707
SEATTLE, WA 98124

BOEING COMPANY, THE
ATTN HOWARD W WICKLEIN MS 17-11
P.O. BOX 3707
SEATTLE, WA 98124

BEOING COMPANY, THE
ATTN ROBERT S CALDWELL 2R-00
P.O. BOX 3707
SEATTLE, WA 98124

BOOZ-ALLEN AND HAMILTON, INC.
ATTN RAYMOND J. CHRISNER
106 APPLE STREET
NEW SHREWSBURY NJ 07724

CALIFORNIA INSTITUTE OF TECHNOLOGY
ATTN A G STANLEY
JET PROPULSION LABORATORY
4800 OAK PARK GROVE
PASADENA, CA 91103

CALIFORNIA INSTITUTE OF TECHNOLOGY
ATTN J BRYDEN
JET PROPULSION LABORATORY
4800 OAK PARK GROVE
PASADENA, CA 91103

AEROSPACE CORPORATION
ATTN LIBRARY
P.O. BOX 92957
LOS ANGELES, CA 90009

ANALOG TECHNOLOGY CORPORATION
ATTN JOHN JOSEPH BAUM
3410 EAST FOOTHILL BOULEVARD
PASADENA, CA 91107

AVCO RESEARCH AND SYSTEMS GROUP
ATTN RESEARCH LIB A830 RM 7201
201 LOWELL STREET
WILMINGTON, MA 01887

BDM CORPORATION, THE
ATTN T H NEIGHBORS
P O BOX 9274
ALBUQUERQUE, NM 87119

BENDIX CORPORATION, THE
ATTN DOCUMENT CONTROL
COMMUNICATION DIVISION
EAST JOPPA ROAD - TOWSON
BALTIMORE, MD 21204

BENDIX CORPORATION, THE
ATTN MAX FRANK
RESEARCH LABORATORIES DIVISION
BENDIX CENTER
SOUTHFIELD, MI 48076

BENDIX CORPORATION, THE
ATTN MGR PRGM DEV DONALD J NIEHAUS
RESERCH LABORATORIES DIVISION
BENDIX CENTER
SOUTHFIELD, MI 48076

FLORIDA, UNIVERSITY OF
ATTN D P KENNEDY
231 AEROSPACE BLDG
GAINESVILLE, FL 32611

FRANKLIN INSTITUTE, THE
ATTN RAMIE H THOMPSON
20TH STREET AND PARKWAY
PHILADELPHIA, PA 19103

GARRETT CORPORATION
ATTN ROBERT E WEIR DEPT 93-9
P.O BOX 92248
LOS ANGELES, CA 90009

GENERAL DYNAMICS CORP.
ATTN D N COLEMAN
ELECTRONICS DIV ORLANDO OPERATIONS
P.O. BOX 2566
ORLANDO, FL 32302

GENERAL ELECTRIC COMPANY
ATTN JOHN L ANDREWS
SPACE DIVISION
VALLEY FORGE SPACE CENTER
GODDARD BLVD KING OF PRUSSIA
P.O. BOX 8555
PHILADELPHIA PA 19101

GENERAL ELECTRIC COMPANY
ATTN JOSEPH C PEDEN CCF8301
SP CE DIVISION
VALLEY FORGE SPACE CENTER
GODDARD BLVD KING OF PRUSSIA
P.O. BOX 8555, PHILADELPHIA PA 19101

GENERAL ELECTRIC COMPANY
ATTN LARRY I CHASEN
SPACE DIVISION
VALLEY FORGE SPACE CENTER
GODDARD BLVD KING OF PRUSSIA
P.O. BOX 8555
PHILADELPHIA PA 19101

GENRAL ELECTRIC COMPANY
ATTN JAMES P SPRATT
SPACE DIVISION
VALLEY FORGE SPACE CENTER
GODDARD BLVD KING OF PRUSSIA
P.O. BOX 8555
PHILADELPHIA PA 19101

GENERAL ELECTRIC COMPANY
ATTN JOHN N PALCHEFSKY
RE-ENTRY AND ENVIRONMENTAL SYSTEMS DIV
P.O. BOX 7722
3198 CHESTNUT STREET
PHILADELPHIA, PA 19101

GENERAL ELECTRIC COMPANY
ATTN ROBERT V BENEDICT
RE-ENTRY AND ENVIRONMENTAL SYSTEMS DIV
P.O. BOX 7722
3198 CHESTNUT STREET
PHILADELPHIA, PA 19101

GENERAL ELECTRIC COMPANY
ATTN JOSEPH REIDL
ORDNANCE SYSTEMS
100 PLASTICS AVENUE
PITTSFIELD, MA 01201

GENERAL ELECTRIC COMPANY
ATTN DASIAC
TEMP-CENTER FOR ADVANCED STUDIES
816 STATE STREET (P.O. DRAWER QQ)
SANTA BARBARA, CA 93102

GENERAL ELECTRIC COMPANY
ATTN ROYDEN R RUTHERFORD
TEMPO=CENTER FOR ADVANCED STUDIES
816 STATE STREET (P.O. DRAWER QQ)
SANTA BARBARA, CA 93102

GENERAL ELECTRIC COMPANY
ATTN M ESPIG
TEMPO-CENTER FOR ADVANCED STUDIES
816 STATE STREET (P.O. DRAWER QQ)
SANTA BARBARA, CA 93102

GENERAL ELECTRIC COMPANY
TTN CSP 0-7 L H DEF
P.O. BOX 1122
SYRACUSE, NY 13201

GENERAL ELECTRIC COMPANY
ATTN JOHN A ELLERHORST E 2
AIRCRAFT ENGINE GROUP
EVENDALE PLANT
CINCINNATI OH 45215

GENERAL ELECTRIC COMPANY
ATTN W J PATTERSON DROP 233
AEROSPACE ELECTRONICS SYSTEMS
FRENCH ROAD
UTICA, NY 13503

GENERAL ELECTRIC COMPANY
ATTN CHARLES U HEWISON DROP 624
AEROSPACE ELECTRONICS SYSTEMS
FRENCH ROAD
UTICA, NY 13503

GENERAL ELECTRIC COMPANY
ATTN DAVID W PEPIN DROP 160
P.O. BOX 5000
BINGHAMTON, NY 13902

GENERAL ELECTRIC COMPANY-TFMPO
ATTN WILLIAM ALFONTE
ATTN: DASTAC
C/O DEFENSE NUCLEAR AGENCY
WASHINGTON, DC 20305

GENERAL RESEARCH CORPORATION
ATTN ROBERT D HILL
P.O. BOX 3587
SANTA BARBARA, CA 93105

GTE SYLVANIA, INC.
ATTN HERBERT A ULLMAN
189 B STREET
NEEDHAM HEIGHTS, MA 02194

GENERAL RESEARCH CORPORATION
ATTN DAVID K OSIAS
WASHINGTON OPERATIONS
WESTGATE RESEARCH PARK
7655 OLD SPRINGHOUSE ROAD, SUITE 700
MCCLEAN, VA 22101

GRUMMAN AEROSPACE CORPORATION
ATTN JERRY ROGERS DEPT 533
SOUTH OYSTER BAY ROAD
BETHPAGE, NY 11714

GTE SYLVANIA INC.
ATTN LEONARD L BLAISDELL
ELECTRONICS SYSTEMS GRP-EASTERN DIV
77 A STREET
NEEDHAM, MA 02194

GTE SYLVANIA, INC.
ATTN CHARLES A THORNHILL LIBRARIAN
ELECTRONICS SYSTEMS GRP-EASTERN DIV
77 A STREET
NEEDHAM, MA 02194

GTE SYLVANIA, INC.
ATTN JAMES A WALDON
ELECTRONICS SYSTEMS GRP-EASTERN DIV
77 A STREET
NEEDHAM, MA 02194

GTE SYLVANIA, INC.
ATTN PAUL B FREDRICKSON
189 B STREET
NEEDHAM HEIGHTS, MA 02194

GTE SYLVANIA, INC.
ATTN H AND V GROUP MARIO A NURPFORA
189 B STREET
NEEDHAM HEIGHTS, MA 02194

HONEYWELL INCORPORATED
ATTN RONALD R JOHNSON A 1622
GOVERNMENT AND AERONAUTICAL
PRODUCTS DIVISION
2600 RIDGEWAY PARKWAY
MINNEAPOLIS, MN 55413

GTE SYLVANIA, INC.
ATTN CHARLES H RAMS OTTOM
189 B STREET
NEEDHAM HEIGHTS, MA 02194

GULTON INDUSTRIES, INC.
ATTN ENGNMAGNETICS DIV
13041 CERISE AVENUE
HAWTHORNE, CA 90250

HARRIS CORPORATION
ATTN T L CLARK M S 4040
HARRIS SEMICONDUCTOR DIVISION
P.O. BOX 883
MELBOURNE, FL 32901

HARRIS CORPORATION
ATTN CARF F DAVOS ,S ;7-220
HARRIS SEMICONDUCTOR DIVISION
P.O. BOX 883
MELBOURNE, FL 32901

HARRIS CORPORATION
ATTN WAUME E ABARE MS 16-111
HARRIS SEMICONDUCTOR DIVISION
P.O. BOX 883
MELBOURNE, FL 32901

HAZELTIME CORPORATION
ATTN TECH INFO CTR M WAITE
PULASKI ROAD
GREEN LAWN, NY 11740

HUGHES AIRCRAFT COMPANY
ATTN KENNETH R WALKER M S 0157
CENTINELLA AND TEALE
CULVER CITY, CA 90230

HUGHES ARICRAFT COMPANY
ATTN-EDWARD C SMITH MS A620
SPACE SYSTEMS DIVISION
P.O. BOX 92919
LOS ANGELES, CA 90009

HONEYWELL INCORPORATED
ATTN R J KELL MS S2572
GOVERNMENT AND AERONAUTICAL
PRODUCTS DIVISION
2600 RIDGEWAY PARKWAY
MINNEAPOLIS, MN 55413

HONEYWELL INCORPORATED
ATTN HARRISON H NOBLE M S 725-5A
AEROSPACE DIVISION
13350 U.S. HIGHWAY 19
ST. PETERSBURG, FL 33733

HONEYWELL INCORPORATED
ATTN M S 725- STACEY H GRAFF
AEROSPACE DIVISION
13350 U. S. HIGHWAY 19
ST. PETERSBURG, FL 33733

HONEYWELL INCORPORATED
ATTN TECHNICAL LIBRARY
RADIATION CENTER
2 FORRES ROAD
LEXINGTON, MA 02173

HUGHES AIRCRAFT COMPANY
ATTN BILLY CAMPBELL M S 6-E-110
CENTINELA AND TEALE
CULVER CITY, CA 90230

HUGHES AIRCRAFT COMPANY
ATTN DAN BINDER MS 6-0147
CENTINELA AND TEALE
CULVER CITY, CA 90230

KAMAN SCIENCES CORPORATION
ATT ALBERT P BRIDGES
P. O. BOX 7463
COLORADO SPRINGS, CO 80933

KAMAN SCIENCES CORPORATION
ATTN WALTER E WARE
P.O. BOX 7463
COLORADO SPRINGS, CO 80933

HUGHES AIRCRAFT COMPANY
ATTN WILLIAM W SCOTT MS 1080
SPACE SYSTEMS DIVISION
P.O. BOX 92919
LOS ANGLES, CA 90009

IBM CORPORATION
ATTN FRANK FRANKOWSKY
ROUTE 170
OWEGO, NY 13827

IBM CORPORATION
ATTN HARRY MATHERS DEPT M41
O WEGO, NY 13827

ION PHYSICS CORPORATION
ATTN ROBERT D EVANS
SOUTH BEDFORD STREET
BURLINGTON, MA 01803

IRT CORPORATION
ATTN MDC
P.O. BOX 81087
SAN DIEGO, CA 92138

MARTIN MARIETTA AEROSPACE
ATTN MONA C GRIFFITH LIB MP-30
ORLANDO DIVISION
P.O. BOX 5837
ORLANDO, FL 32805

MARTIN MARIETTA AEROSPACE
ATTN WILLIAM W MRAS MP-413
ORLANDO DIVISION
P.O BOX 5837
ORLANDO, FL 32805

MARTIN MARIETTA AEROSPACE
ATTN JACK M ASHFORD MP-537
ORLANDO DIVISION
ORLANDO, FL 32805

MARTIN MARIETTA CORPORATION
ATTN PAUL G WASE MAIL 8203
DENVER DIVISION
P.O BOX 179
DENVER, CO 80201

LITTON SYSTEMS, INC.
ATTN JOHN P RETZLER
GUIDANCE AND CONTROL SYSTEMS DIVISION
5500 CANOGA AVENUE
WOODLAND HILLS, CA 91364

LITTON SYSTEMS, INC.
ATTN VAL J ASHBY MS 67
5500 CANOGA AVENUE
WOODLAND HILLS, CA 91364

LOCKHEED MISSILES AND SPACE CO INC.
P.O. BOX 504
SUNNYVALE, CA 94088

LOCKHEED MISSILES AND SPACE CO INC
ATTN GEORGE F HEATH D/81-14
P.O. BOX 504
SUNNYVALE, CA 94088

LOCKHEED MISSILES AND SPACE CO INC
ATTN EDWIN A SMITH DEPT R5-A5
P.O. BOX 504
SUNNYVALE, CA 94088

LOCKHEED MISSILES AND SPACE CO INC.
ATTN L ROSSI DEPT 81-64
P.O. BOX 504
SUNNYVALE, CA 94088

LOCKHEED MISSILES AND SPACE CO INC
ATTN PHILIP J HART DEPT 81-14
P.O. BOX 504
SUNNYVALE, CA 94088

LOCKHEED MISSILES AND SPACE CO INC.
ATTN BEN AMIN T KIMURA DEPT 81-14
P.O. BOX 504
SUNNYVALE, CA 94088

LOCKHEED MISSILES AND SPACE COMPANY
ATTN TECH INFO CTR D/COLL
3251 HANDOVER STREET
PALO ALTO, CA 94304

MARTIN MARIETTA CORPORATION
ATTN RESEARCH LIB 6617 JAY R MCKEE
DENVER DIVISION
P.O.BOX 179
DENVER, CO 80201

MARTIN MARIETTA CORPORATION
ATTN BEN T GRAHAM MS PO-454 ∂
DENVER DIVISION
P.O. BOX 179
DENVER, CO 80201

MARTIN MARIETTA CORPORATION
ATTN J E GOODWIN MAIL o452 (UNCL ONLY)
DENVER DIVISION
P.O. BOX 179
DENVER, CO 80201

MITRE CORPORATION, THE
ATTN LIBRARY
P.O. BOX 208
BEDFORD, MA 01730

NATIONAL ACADEMY OF SCIENCES
ATTN R S SHANE NAT MATERIALS ADVSY
ATTN: NATIONAL MATERIALS ADVISORY BOA
2101 CONSTITUTION AVENUE
WASHINGTON, DC 20418

NEW MEXICO, UNIVERSITY OF
ATTN W W GRANNEMANN (UNCLASS ONLY)
DEPT. OF CAMPUS SECURITY AND POLICE
1821 ROMA N.E.
ALBUQUERQUE, NM 87106

NORTHROP CORPORATION
ATTN BOYCE T AHLPORT
ELECTRONIC DIVISION
1 RESEARCH PARK
PALOS VERDES PENINSULA, CA 90274

NORTHROP CORPORATION
ATTN JOHN M REYNOLDS
ELECTRONIC DIVISION
1 RESEARCH PARK
PALOS VERDES PENINSULA, CA 90274

LTV AEROSPACE CORPORATION
ATTN TECHNICAL DATA CENTER
VOUGHT SYSTEMS DIVISION
P.O. BOX 6267
DALLAS, TX 75222

LTV AEROSPACE CORPORATION
ATTN TECHNICAL DATA CTR
P.O. BOX 5907
DALLAS, TX 75222

M.I.T. LINCOLN LABORATORY
ATTN LEONA LOUGHLIN LIBRARIAN A-082
P.O. BOX 73
LEXINGTON, MA 02173

MCDONNELL DOUGLAS CORPORATION
ATTN TECHNICAL LIBRARY
POST OFFICE BOX 516
ST. LOUIS, MISSOURI 63166

MCDONNELL DOUGLAS CORPORATION
ATTN TO ENDER
POST OFFICE BOX 516
ST. LOUIS, MISSOURI 63166

MCDONNELL DOUGLAS CORPORATION
ATTN STANLEY SCHNEIDER
5301 BOLSA AVENUE
HUNTINGTON BEACH, CA 92647

MCDONNELL DOUGLAS CORPORATION
ATTN TECHNICAL LIBRARY, C1-290/36-84
3855 LAKEWOOD BOULEVARD
LONG BEACH, CA 90846

MISSION RESEARCH CORPORATION
ATTN WILLIAM C HART
735 STATE STREET
SANTA BARBARA, CA 93101

NORTHROP CORPORATION
ATTN VINCENT R DEMARTINO
ELECTRONIC DIVISION
1 RESEARCH PARK
PALOS VERDES PENINSULA, CA 90274

NORTHROP CORPORATION
ATTN GEORGE H TOWNER
ELECTRONIC DIVISION
1 RESEARCH PARK
PALOS VERDES PENINSULA, CA 90274

NORTHROP CORPORATION
ATTN ORLIE L CURTIS R
NORTHROP RESEARCH AND TECHNOLOGY CTR
3401 WEST BROADWAY
HAWTHORNE, CA 90250

NORTHROP CORPORATION
ATTN DAVID N POCUCK
NORTHROP RESERCH AND TECHNOLOGY CTR
3401 WEST BROADWAY
HAWTHORNE, CA 90250

NORTHROP CORPORATION
ATTN JOSEPH D RUSSO
ELECTRONIC DIVISION
2301 WEST 120TH STREET
HAWTHORNE, CA 90250

PALISADES INST FOR RSCH SERVICES INC
ATTN RECORDS SUPERVISOR
201 VARICK STREET
NEW YORK, NY 10014

PHYSICS INTERNATIONAL COMPANY
ATTN DOC CON FOR CHARLES H STALLINGS
2700 MERCED STREET
SAN LEANDRO, CA 94577

PHYSICS INTERNATIONAL COMPANY
ATTN DOC CON FOR JOHN H HUNTINGTON
2700 MERCED STREET
SAN LEANDRO, CA 94577

MISSION RESEARCH CORPORATION-SAN DIEGO
ATTN V A J VAN LINT
7650 CONVOY COURT
SAN DIEGO, CA 92111

MITRE CORPORATION, THE
ATTN M E FITZGERALD
P.O. BOX 208
BEDORD, MA 01730

R AND D ASSOCIATES
ATTN S CLAY ROGERS
P.O. BOX 9695
MARINA DEL REY CA 90291

RAYTHEON COMPANY
ATTN GAUANAN H JOSHI RADAR SYS LAB
HARTWELL ROAD
BEDFORD, MA 01730

RAYTHEON COMPANY
ATTN HAROLD L FLESCHER
528 BOSTON POST ROAD
SUDBURY, MA 01776

RCA CORPORATION
ATTN GEORGE J BRUCKER
GOVERNMENT AND COMMERCIAL SYSTEMS
ASTRO ELECTRONICS DIVISION
P.O. BOX 800, LOCUST CORNER
PRINCETON, NJ 08540

RCA CORPORATION
ATTN K H ZAININGER
DAVID SARNOFF RESEARCH CENTER
W. WINDSOR TWP
201 WASHINGTON ROAD, P.O. BOX 432
PRINCETON, NJ 08540

RCA CORPORATION
ATTN E VAN KEUREN 13-5-2
CAMDEN COMPLEX
FRONT AND COOPER STREETS
CAMDEN, NJ 08012

POWER PHYSICS CORPORATION
ATTN MITCHELL BAKER
542 INDUSTRIAL WAY WEST
P.O. BOX 626
EATONTOWN, NJ 07724

ROCKWELL INTERNATIONAL CORPORATION
ATTN DENNIS SUTHERLAND
ELECTRONICS OPERATIONS
COLLINS RADIO GROUP
5225 C AVENUE NE
CEDAR RAPIDS, IA 52406

ROCKWELL INTERNATIONAL CORPORATION
ATTN MILDRED A BLAIR
ELECTRONICS OPERATIONS
COLLINS RADIO GROUP
5225 C AVENUE NE
CEDAR RAPIDS, IA 52406

SANDERS ASSOCIATES, INC.
ATTN ME L ATTEL NCA 1-3236
95 CANAL STREET
NASHUA, NH 03060

SCIENCE APPLICATIONS, INC.
ATTN LARRY SCOTT
P.O. BOX 2351
LA JOLLA, CA 92038

SCIENCE APPLICATIONS, INC.
ATTN J ROBERT BEYSTER
P.O. BOX 2351
LA JOLLA, CA 92038

SCIENCE APPLICATIONS, INC.
ATTN NOEL R BYRN
HUNTSVILLE DIVISION
2109 W. CLINTON AVENUE
SUITE 700
HUNTSVILLE, AL 35805

SCIENCE APPLICATIONS, INC.
ATTN CHARLES STEVENS
2680 HANOVER STREET
PALO ALTO, CA 94303

RENSSELAER POLYTECHNIC INSTITUTE
ATTN RONALD J GUTMANN
P.O. BOX 965
TROY, NY 12181

RESEARCH TRIANGLE INSTITUTE
ATTN ENG DIV MAYRANT SIMONS
P.O. BOX 12194
RESEARCH TRIANGLE PARK, NC 27709

ROCKWELL INTERNATIONAL CORPORATION
ATTN GEORGE C MESSENGER F 861
3370 MIRALOMA AVENUE
ANAHEIM, CA 92803

ROCKWELL INTERNATIONAL CORPORATION
ATTN JAMES E BELL HA10
3370 MIRALOMA AVENUE
ANAHEIM, CA 92803

ROCKWELL INTERNATIONAL CORPORATION
ATTN K F HULL
3370 MIRALOMA AVENUE
ANAHEIM, CA 92803

ROCKWELL INTERNATIONAL CORPORATION
ATTN DONAL J STEVENS FA70
3370 MIRALOMA AVENUE
ANAHEIM, CA 92803

ROCKWELL INTERNATIONAL CORPORATION
ATTN T B YATES
5701 WEST IMPERIAL HIGHWAY
LOS ANGELES, CA 90009

ROCKWELL INTERNATIONAL CORPORATION
ATTN ALAN A LANGENFELD
ELECTRONICS OPERATIONS
COLLINS RADIO GROUP
5225 C AVENUE NE
CEDAR RAPIDS, IA 52406

SIMULATION PHYSICS, INC.
ATTN ROGER G LITTLE
41 "8" STREET
BURLINGTON, MA 01803

SINGER COMPANY (DATA SYSTEMS), THE
ATTN TECH INFO CENTER
150 TOTU A ROAD
WAYNE, NJ 07470

SINGER COMPANY, THE
ATTN IRWIN GOLDMAN ENG MANAGEMENT
1150 MC BRIDE AVENUE
LITTLE FALLS, NJ 07424

SPERRY FLIGHT SYSTEMS DIVISION
ATTN D ANDREW SCHON
SPERRY RAND CORPORATION
P.O. BOX 21111
PHOENIX, AZ 85036

SPERRY RAND CORPORATION
ATTN JAMES A INDA MS 41T25
UNIVA DIVISION
DEFENSE SYSTEMS DIVISION
P.O. BOX 3525 MAIL STATION 1931
ST. PAUL, MN 55101

SPERRY RAND CORPORATION
ATTN CHARLES L CRAIGEN
SPERRY DIVISION
SPERRY GYROSCOPE DIVISION
SPERRY SYSTEMS MANAGEMENT DIVISION
MARCUS AVENUE
GREAT NEACK, NY 11020

SPERRY RAND CORPORATION
ATTN PAUL MARAFFIND
SPERRY DIVISION
SPERRY GYROSCOPE DIVISION
SPERRY SYSTEMS MANAGEMENT DIVISION
MARCUS AVENUE
GREAT NECK, NY 11020

STANFORD RESEARCH INSTITUTE
ATTN ROBERT A ARMISTEIN
333 RAVENSWOOD AVENUE
MENLO PARK, CA 94025

STANFORD RESERACH INSTITUTE
ATTN PHILIP I DOLAN
333 RAVENSWOOD AVENUE
MENLO PARK, CA 94025

STANFORD RESEARCH INSTITUTE
ATTN MACPHERSON MORGAN
306 WYNN DRIVE, N. W.
HUNTSVILLE, AL 35805

SUNDSTRAND CORPORATION
ATTN CURTIS B WHITE (NO CLASS)
4751 HARRISON AVENUE
ROCKFORD, IL 61101

SYSTRON-DONNER CORPORATION
ATTN HAROLD D MORRIS
1090 SAN MIGUEL ROAD
CONCORD, CA 94518

SYSTRON-DONNER CORPORATION
ATTN GORDON R DEAN
1090 SAN MIGUEL ROAD
CONCORD, CA 94518

TEXAS INSTRUMENTS, INC.
ATTN DONALD J HANUS M S 72
P.O. BOX 5474
DALLAS, TX 75222

MISSION
of
Rome Air Development Center

RADC plans and conducts research, exploratory and advanced development programs in command, control, and communications (C^3) activities, and in the C^3 areas of information sciences and intelligence. The principal technical mission areas are communications, electromagnetic guidance and control, surveillance of ground and aerospace objects, intelligence data collection and handling, information system technology, ionospheric propagation, solid state sciences, microwave physics and electronic reliability, maintainability and compatibility.



Printed by
United States Air Force
Hanscom AFB, Mass. 01731